


- IEC60950 Compatible.
- RoHS Compliant.
- Surface Mount Device.
- Operating temperature range(Including self temperature rise): -40℃ to +125℃.




Electrical Specifications @25°C									
Part Number	Turns Ratio(±3%)	OCL @100KHz,0.1V	LK @100KHz,0.1V	DCR (mΩ max)			HI-POT (2mA/3Sec)		
	1-3 :9,10-6,7 : 4-5	1-3	1-3 (short other pins)	4-5	9,10-6,7	1-3	PRI-SEC	PRI-CORE	SEC-CORE
TTEP13-1729SG	26 : 9 : 8	70uH ±10%	1.5uH max	111	20	151	1500Vac	500Vac	1500Vac

MECHANICAL

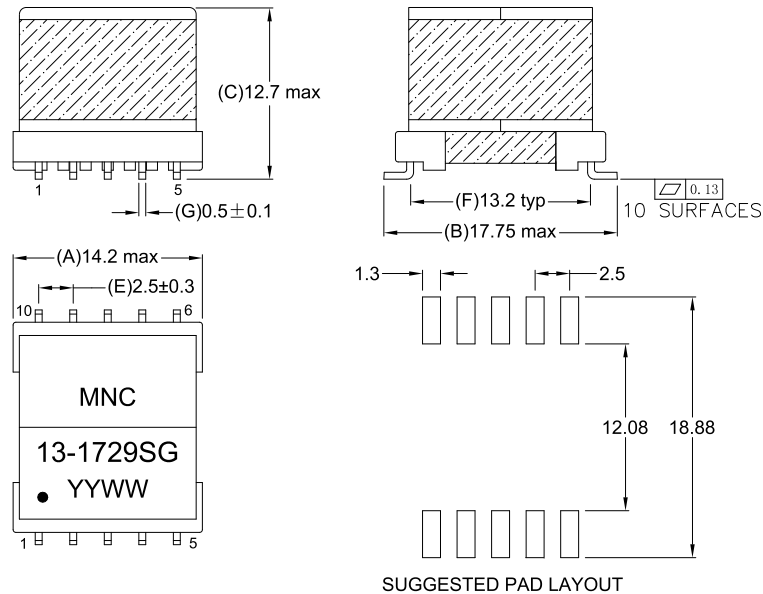

Unless otherwise specified all tolerances are:±0.25 in mm

SCHEMATICS

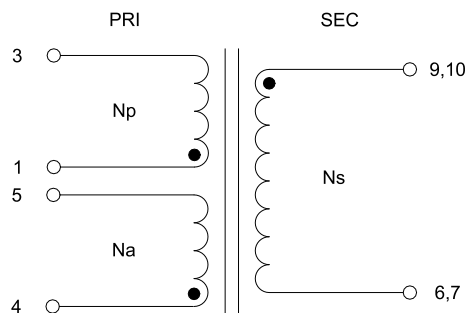

● Start Point