




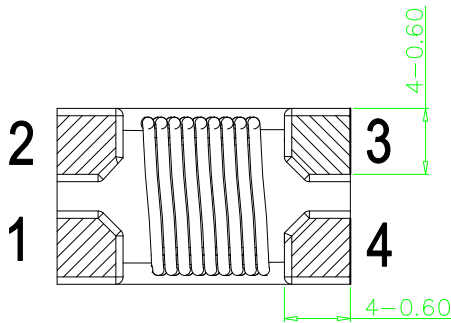
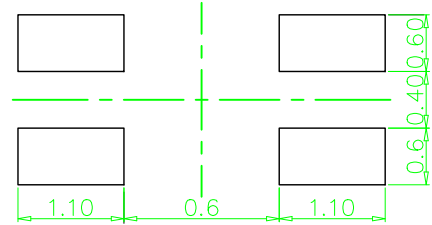
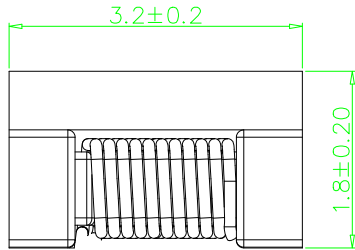


-  High Common Mode Impedance at High Frequency.
-  Excellent Noise Suppression Performance.
-  Small Size and Low Profile, Surface Mount Type.
-  Operating Temperature Range: -40°C to +85°C.
-  RoHS Compliant.


Electrical Specifications @25°C

Part Number	Turns Ratio (±5%)	Common Mode Impedance	Insulation Resistance	Rated Current	DC Resistance	Rated Voltage
		Ω, @100MHz	MΩ Min	mA Max	Ω Max	Vdc Max
CM3216A-222	1:1	2200±25%	10	200	1.2	50

MECHANICAL DIMENSIONS (unit:mm)



Recommended PAD Layout



Unless otherwise specified all tolerances are:±0.25mm

SCHEMATIC

