


- IEC60950 Compatible.
- RoHS Compliant.
- Surface Mount Device.
- Operating temperature range (Including self temperature rise): -40 °C to +125 °C.




Electrical Specifications @25 °C								
Part Number	Turns Ratio(±3%)	OCL(uH±10%) @100KHz,0.1V	LK(uH max) @100KHz,0.1V	DCR (mΩ max)				HI-POT (Vrms)
	1-3:6-7:8-9:5:4	1-3	1-3 (short other pins)	1-3	5-4	6-7	8-9	pin (3,4-7,8)
EP-423SG	1:0.307:0.307:0.692	95	1.0	230	500	37	80	1500

SCHEMATICS

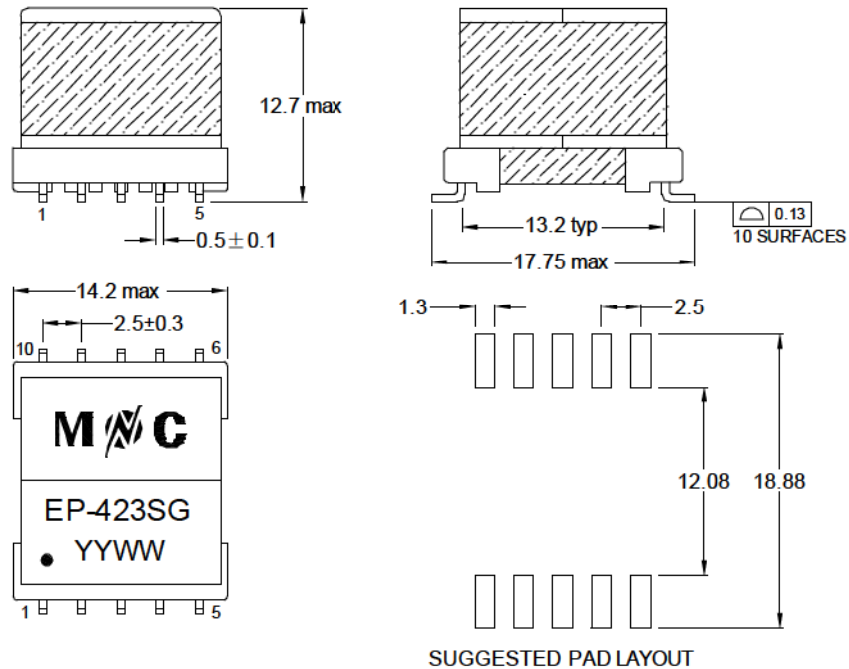

Unless otherwise specified all tolerances are: ±0.25 in mm

SCHEMATICS

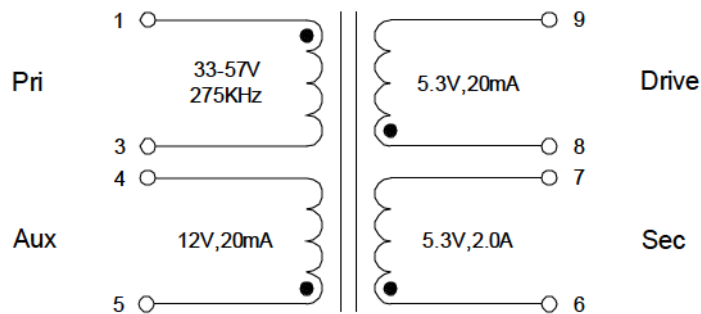

Tape&Reel Weight 200pcs per reel
6.23g/pcs