


- RoHS Compliant (RoHS6).
- IEC60950 Compliancy.
- Termination finished: Sn-0.7Cu.
- Storage temperature range : -40°C to +85°C.
- Operate temperature range: -40°C to +105°C

Electrical Specifications @25°C

Part Number	Turns Ratio(±3%) @100KHz,1V	OCL @100KHz,0.1V	LK @100KHz,0.1V	DCR (mΩ Max)			HI-POT (1mA,2sec)	
	2-1 : 7,8-9,10 : 3-4	2-1	2-1 (short other pins)	2-1	3-4	7,8-9,10	Pri/Aux To Sec	WdgTo Core
TOEP13-0294SG	1 : 0.389 : 0.444	140uH ±7%	1.3uH max	365	290	40	1500VAC	600VAC

MECHANICAL DIMENSIONS(mm)

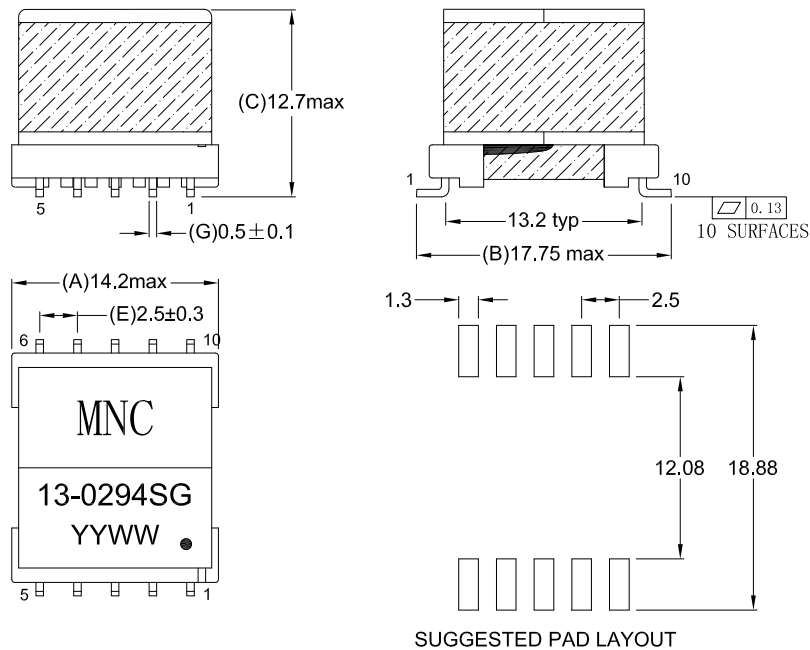

Unless otherwise specified all tolerances are:±0.25 in mm

SCHEMATICS

