
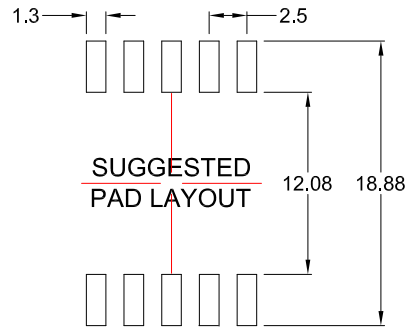

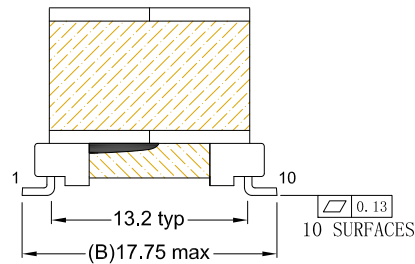


- RoHS Compliant (RoHS6).
- IEC60950 Compliancy.
- Termination finished: Sn-0.7Cu.
- Storage temperature range : -40°C to +85°C.
- Operate temperature range : -40°C to +85°C.

Electrical Specifications @25°C							
Part Number	Turns Ratio @100KHz,1V	OCL @100KHz,0.1V	LK @100KHz,0.1V	DCR			HI-POT (1mA,2Sec,60Hz)
	5-3 : 6,7-9,10 : 2-1	5-3	5-3 (short other pins)	5-3	6,7-9,10	2-1	Pri-Sec
TOEP13-0399SG	2 : 1 : 1.1 ±3%	37uH ±10%	0.75uH max	89mΩ Max	28mΩ Max	96mΩ Max	1500Vac

MECHANICAL DIMENSIONS(mm)



YYWW
WEEK
YEAR

Unless otherwise specified all tolerances are:±0.25 in mm

SCHEMATICS

