






-  IEC60950 Compatible.
-  RoHS Compliant.
-  Surface Mount Device.
-  Operating temperature range (Including self temperature rise): -40 °C to +125 °C.




Electrical Specifications @25 °C								
Part Number	Turns Ratio(±3%)	OCL(uH±10%) @100KHz,0.1V	LK(uH max) @100KHz,0.1V	DCR (mΩ max)				HI-POT (DC)
	3-5:11,12-9,10:2-1:8-7	3-5	3-5 (short other pins)	3-5	2-1	8-7	11,12-9,10	pin (2,3-8,9,10)
EFD-222SG	1:0.23:0.54:0.27	L _{0A} =170 L _{1.2A} ≥ 85%(L _{0A})	3.0	600	2000	720	50	1500

SCHEMATICS

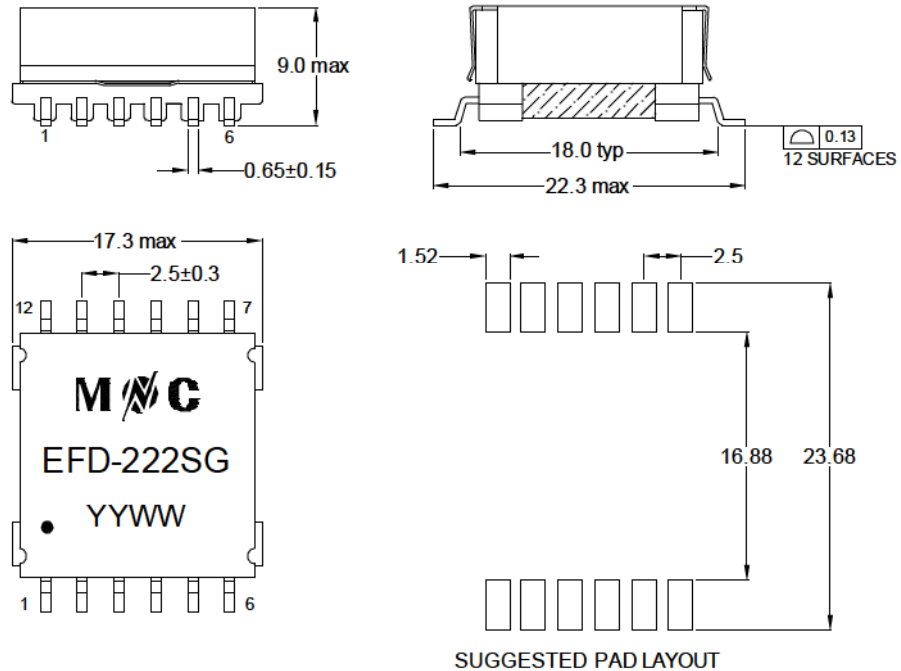

Unless otherwise specified all tolerances are: ±0.25 in mm

SCHEMATICS

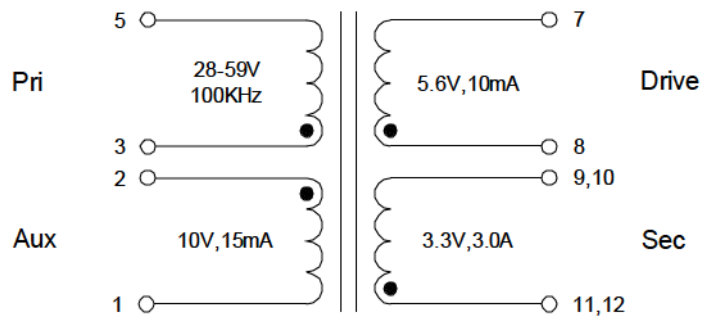

Tape&Reel Weigh 250pcs per reel
6.30g/pcs