


- IEC60950 Compatible.
- RoHS Compliant.
- Surface Mount Device.
- Operating temperature range (Including self temperature rise): -40 °C to +125 °C.




Electrical Specifications @25 °C								
Part Number	Turns Ratio(±3%)	OCL(uH±10%) @100KHz,0.1V	LK(uH max) @100KHz,0.1V	DCR (mΩ max)				HI-POT (DC)
	3-5:11,12-9,10:2-1:8-7	3-5	3-5 (short other pins)	3-5	2-1	8-7	11,12-9,10	pin (2,3-8,9,10)
EFD-252SG	1:0.154:0.5:0.27	L <sub>0A</sub> =170 L <sub>1.2A</sub> ≥85%(L <sub>0A</sub> )	3.0	600	2000	720	25	1500

## SCHEMATICS

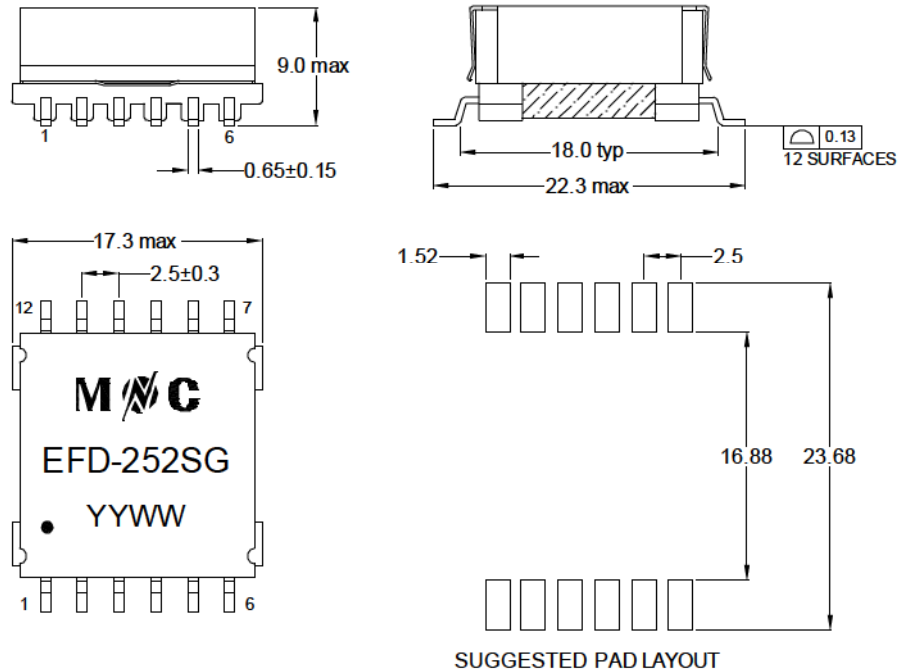

Unless otherwise specified all tolerances are: ±0.25 in mm

## SCHEMATICS

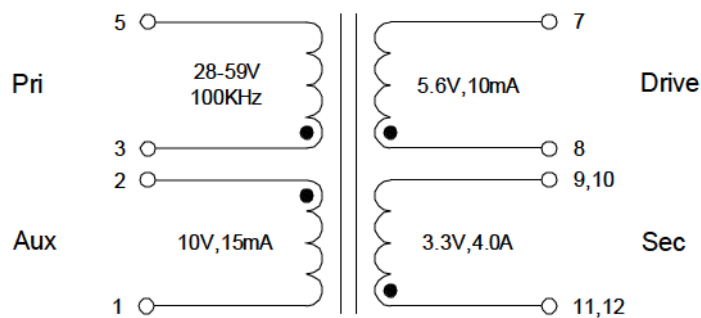

Tape&Reel Weigh 250pcs per reel  
6.00g/pcs