


- IEC60950 Compatible.
- RoHS Compliant.
- Surface Mount Device.
- Operating temperature range (Including self temperature rise): -40 °C to +125 °C.




Electrical Specifications @25 °C									
Part Number	Turns Ratio(±3%)	OCL(uH±10%) @100KHz,0.1V	LK(uH max) @100KHz,0.1V		DCR (mΩ max)				HI-POT (Vrms) pin (2,3-8,9,10)
	3-5:11,12-9,10:2-1:8-7	3-5	3-5 (short other pins)	8-7 (short other pins)	3-5	2-1	8-7	11,12-9,10	
EFD-275SG	1:0.5:0.5:0.25	L _{0A} =166.5 L _{1.2A} ≥90%(L _{0A})	1.8	0.3	760	1100	475	103	1500

SCHEMATICS

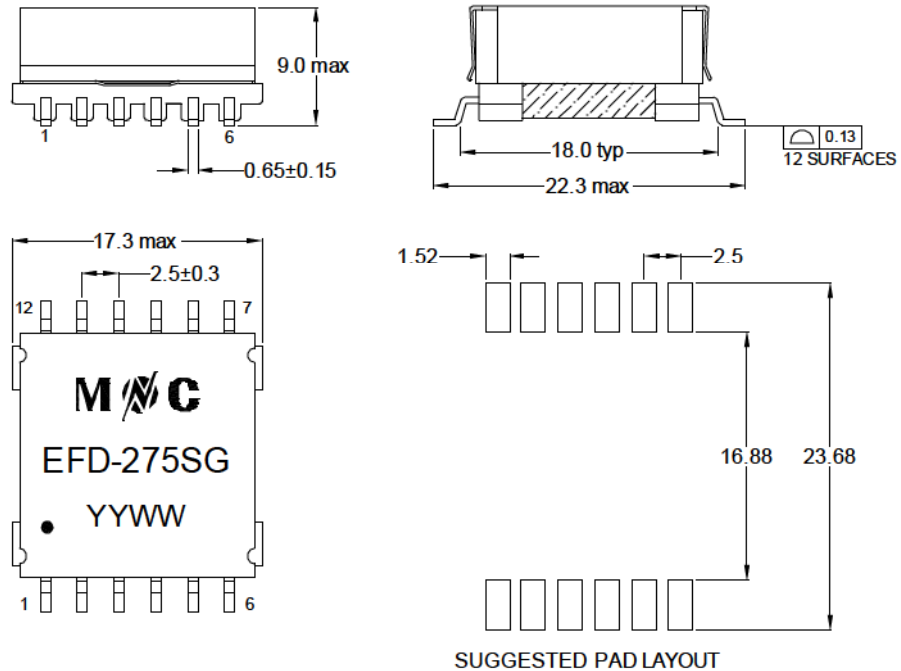

Unless otherwise specified all tolerances are: ±0.25 in mm

SCHEMATICS

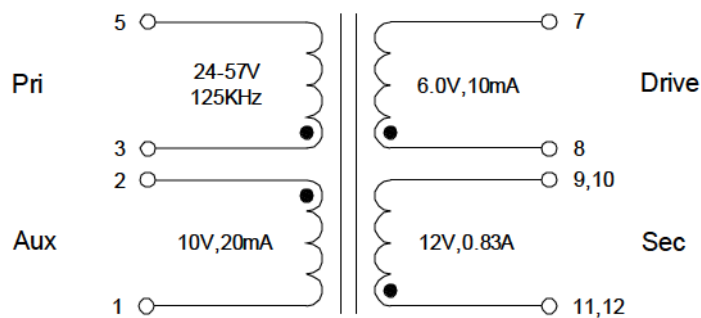

Tape&Reel Weight 250pcs per reel
5.85g/pcs