


- IEC60950 Compatible.
- RoHS Compliant.
- Surface Mount Device.
- Operating temperature range (Including self temperature rise): -40 °C to +125 °C.




Electrical Specifications @25 °C							
Part Number	Turns Ratio(±3%)	OCL(uH±10%) @100KHz,0.1V	LK(uH max) @100KHz,0.1V	DCR (mΩ max)			HI-POT (Vrms)
	3-4:5,6-7,8:2-1	3-4	3-4 (short other pins)	3-4	2-1	5,6-7,8	Pri/Aux-Sec
EP-525SG	1:0.7:0.7	L _{0A} =310 L _{0.3A} ≥90%(L _{0A})	4.25	1040	2010	700	1500

SCHEMATICS

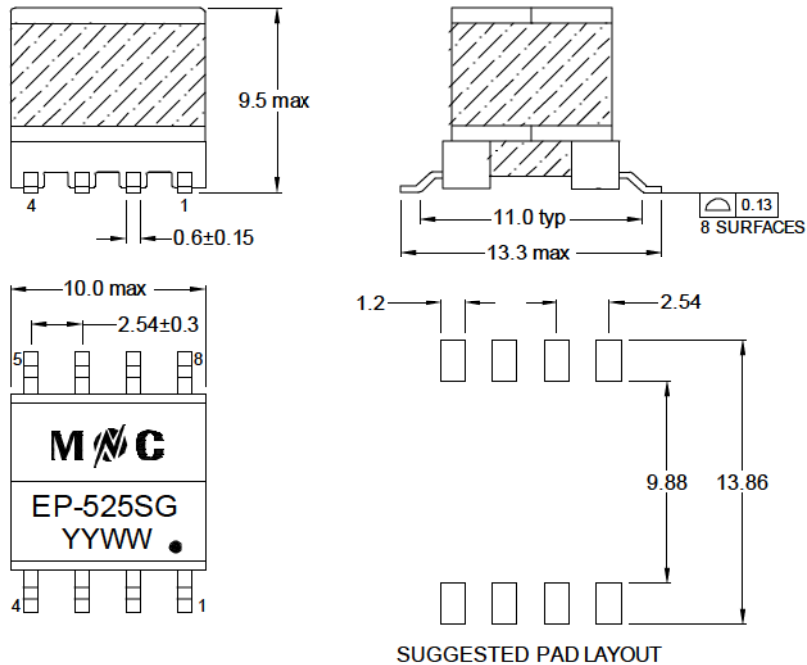

Unless otherwise specified all tolerances are: ±0.25 in mm

SCHEMATICS

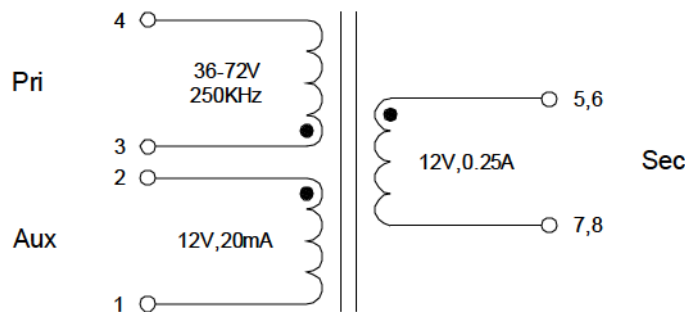

Tape&Reel Weight 400pcs per reel
1.89g/pcs