


- IEC60950 Compatible.
- RoHS Compliant.
- Surface Mount Device.
- Operating temperature range (Including self temperature rise): -40 °C to +125 °C.




Electrical Specifications @25 °C								
Part Number	Turns Ratio(±3%)	OCL(uH±10%) @200KHz,0.1V	LK(uH max) @100KHz,0.1V	DCR (mΩ max)				HI-POT (Vrms)
	3-4:5-6:7-8:2-1	3-4	3-4 (short other pins)	3-4	2-1	5-6	7-8	Pri/Aux-Sec
EP-569SG	1:0.262:0.143:0.786	L <sub>0A</sub> =100 L <sub>1.0A</sub> ≥80%(L <sub>0A</sub> )	3.6	414	1000	45	80	1500

## SCHEMATICS

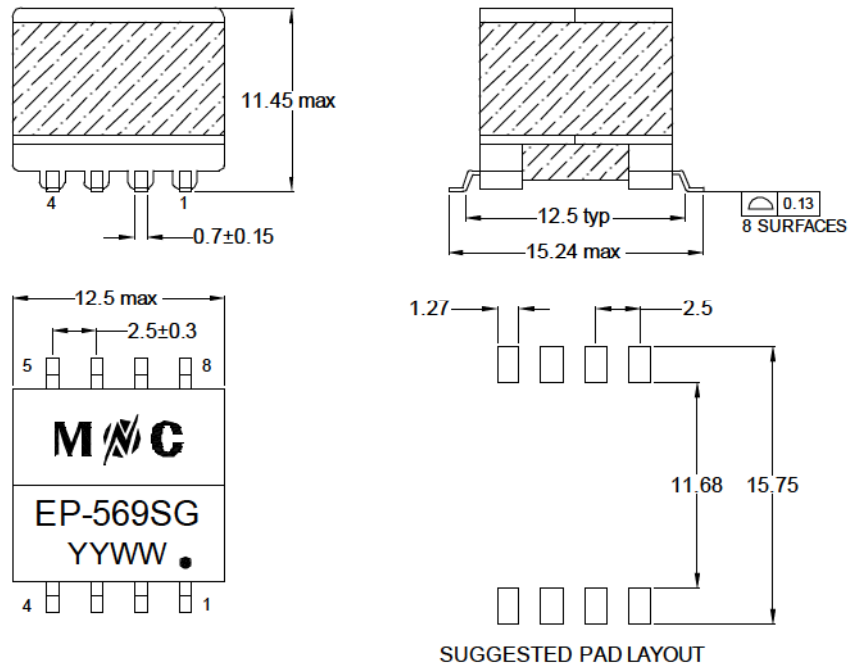

Unless otherwise specified all tolerances are: ±0.25 in mm

## SCHEMATICS

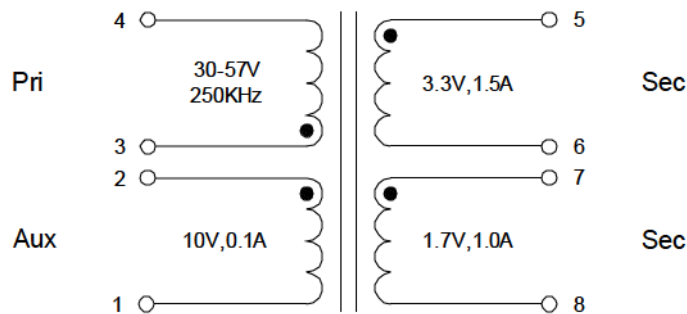

Tape&Reel Weight 250pcs per reel  
3.33g/pcs