


- Meets IEEE 802.3 Standards.
- RoHS Compliant.
- Storage temperature : -40°C to +125°C.
- Operating temperature : -40°C to +85°C.
- AEC-Q200 Qualified.



Electrical Specifications @25°C

Part Number	OCL(uH Min) @100KHz,0.1V With 8mA DC Bias	Turns Ratio (±2%)	DCR (Ω Max)	Insertion Loss (dB Max)	Return Loss (dB Min)			CMRR (dB Min)		Cross talk (dB Min)		HI-POT (Vrms)
	1-100MHz			1-30MHz	30-60MHz	60-80MHz	1-60MHz	60-100MHz	1-60MHz	60-100MHz		
HF1021G	350	1CT:1CT	1.2	-1.15	-18	-13	-12	-37	-28	-40	-35	1500

MECHANICAL

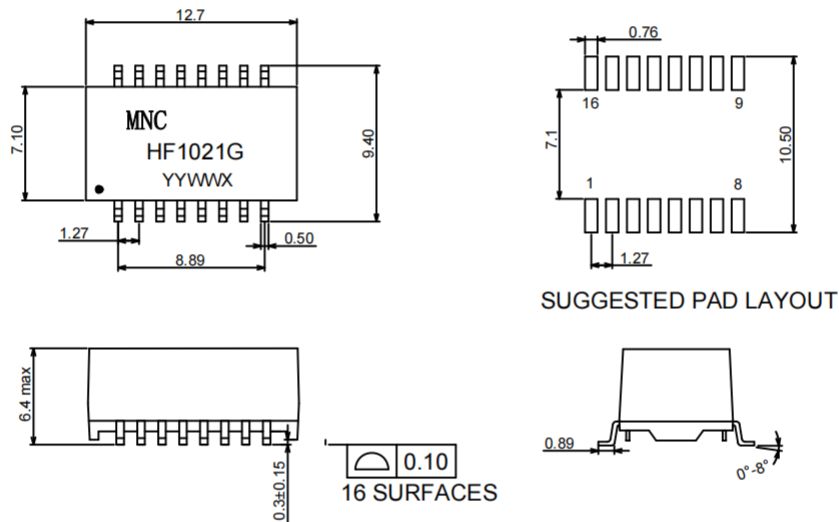

Unless otherwise specified all tolerances are:±0.25 in mm

SCHEMATICS

