

Features


- Ⓢ RoHS compliant
- Ⓢ Magnetic shield construction
- Ⓢ CompositeMagnetic powder core
- Ⓢ Handle transient current spikes without saturation
- Ⓢ Ultra low buzz noise due to composite construction
- Ⓢ Moisture Sensivity Level (MSL): 1
- Ⓢ Excellent temperature stability for inductance and saturation
- Ⓢ Operating temperature rang(Including temperature rise):
-55°C to +125°C

Applications

- Ⓢ DC/DC converters
- Ⓢ Battery powered devices
- Ⓢ Low profile ,high current power supplies
- Ⓢ PDA/notebook/desktop/server applications



Mechanical Dimensions (Units:mm)

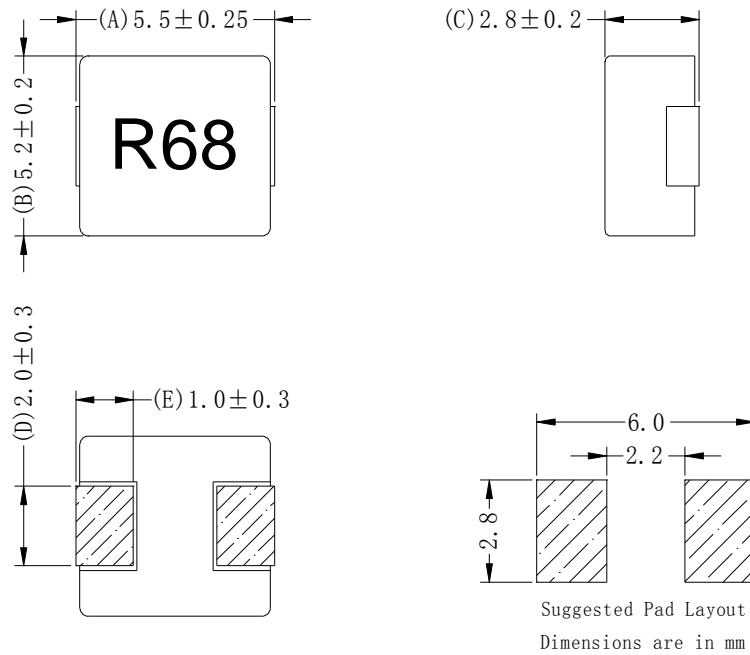

Electrical Specifications


Part Number	L (μ H)	DCR (m Ω)		I _{rms} (A)	I _{sat} (A)
		Typ.	Max.		
MHA0530NSGR10M	0.10 ± 20%	2.50	3.00	15.0	25.0
MHA0530NSGR22M	0.22 ± 20%	3.40	3.90	12.0	16.0
MHA0530NSGR33M	0.33 ± 20%	5.00	5.70	11.0	14.0
MHA0530NSGR47M	0.47 ± 20%	6.50	7.50	9.00	12.5
MHA0530NSGR68M	0.68 ± 20%	8.50	9.80	8.00	11.0
MHA0530NSG1R0M	1.00 ± 20%	11.0	13.0	6.50	9.5
MHA0530NSG1R5M	1.50 ± 20%	16.0	20.0	5.50	8.5
MHA0530NSG2R2M	2.20 ± 20%	25.0	29.0	5.00	7.5
MHA0530NSG3R3M	3.30 ± 20%	34.0	38.0	4.50	6.5

MHA0530NSG4R7M	4.70 ± 20%	48.0	54.0	4.00	5.5
MHA0530NSG6R8M	6.80 ± 20%	75.0	84.0	2.50	4.0
MHA0530NSG100M	10.0 ± 20%	115.0	130.0	1.80	3.0

Notes:

1. All of the electrical specifications are test at 25°C , inductance test at 100KHz/0.25V.
2. Irms is the current that caused a approximate 40°C temperature rise from 25°C ambient.
3. Isat is the DC current at which inductance drop approximately 30% from its value without current.
4. The part temperature(ambient + temp.rise) should not exceed 125°C under worst case operating conditions. Circuit design,component placement,PCB trace size and thickness,airflow and other cooling provisions all affect the part temperature.Part temperature should be verified in the end application.
5. Due to product improvement, Product specificationsMay be changed discontinuously without advance notice.
Please contact with sales representatives or product engineers, and theMentech product approval sheet shall be obtained before ordering.

Packaging Specifications (Units:mm)

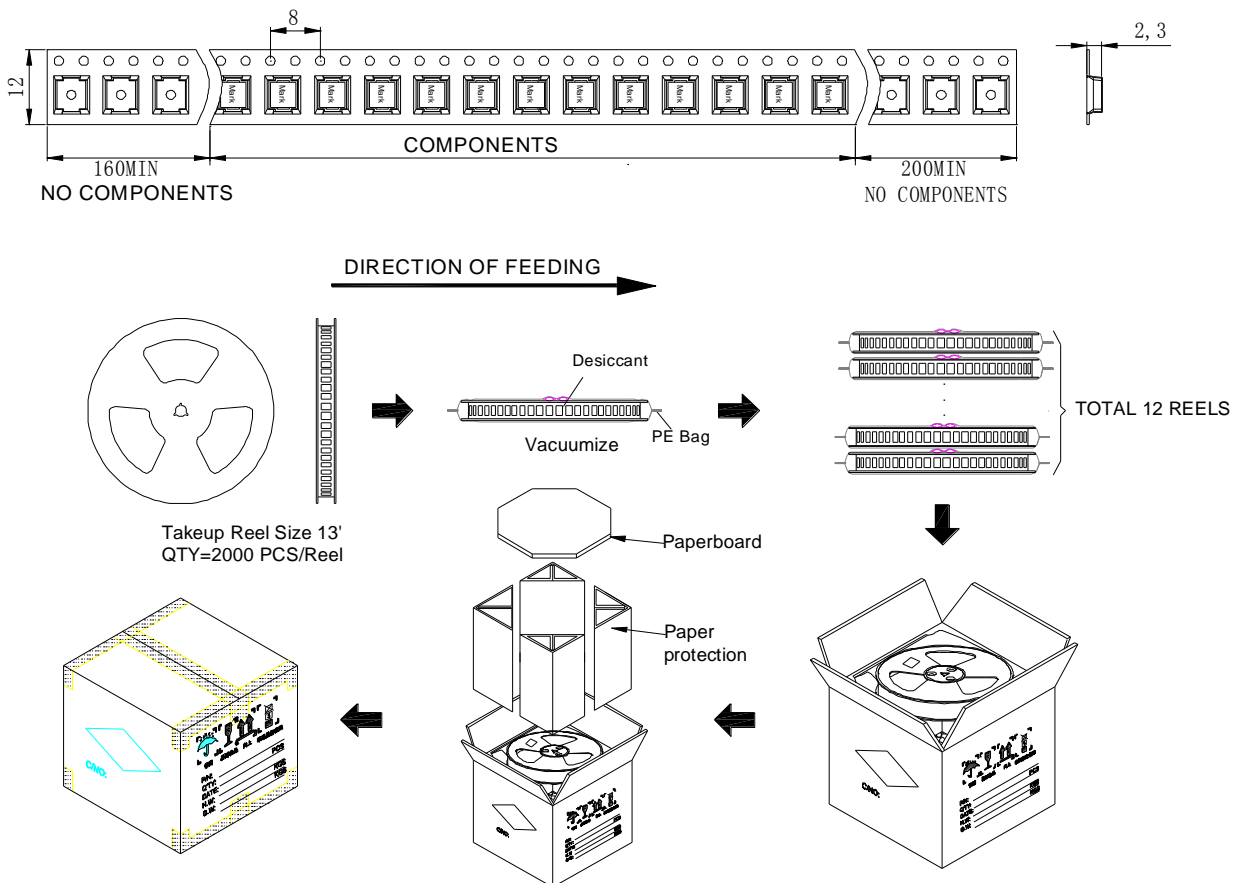

2000Pcs/Reel	12Reels/Carton
	24000Pcs/Carton