


Features


- Ⓞ RoHS compliant
- Ⓞ Magnetic shield construction
- Ⓞ Composite magnetic powder core
- Ⓞ Handle transient current spikes without saturation
- Ⓞ Ultra low buzz noise due to composite construction
- Ⓞ Moisture Sensitivity Level (MSL): 1
- Ⓞ Excellent temperature stability for inductance and saturation
- Ⓞ AEC-Q200 Grade 0 qualified (- 55°C to +155°C ambient)
- Ⓞ Operating temperature rang(Including temperature rise): -55°C to +155°C

Applications

- Ⓞ Airbag
- Ⓞ LED lighting
- Ⓞ High current power supplies
- Ⓞ ADAS, Infotainment system



Mechanical Dimensions (Units:mm)

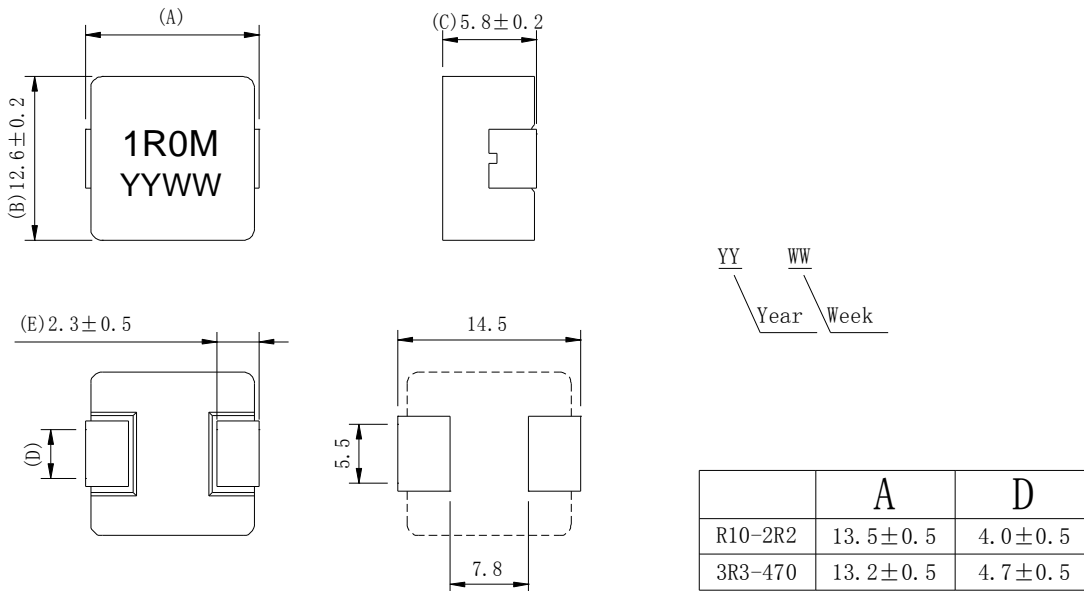

Electrical Specifications



Part Number	L (μ H)	DCR (m Ω)		I _{rms} (A)	I _{sat} (A)
		Typ.	Max.		
MHAF1250SGR10M	0.10	0.33	0.59	60.0	80.0
MHAF1250SGR22M	0.22	0.60	0.72	54.0	75.0
MHAF1250SGR33M	0.33	0.77	0.93	50.0	70.0
MHAF1250SGR47M	0.47	1.00	1.20	42.0	50.0
MHAF1250SGR68M	0.68	1.34	1.61	33.0	40.0
MHAF1250SGR82M	0.82	1.50	1.80	29.5	38.0
MHAF1250SG1R0M	1.00	1.90	2.28	26.5	33.0
MHAF1250SG1R5M	1.50	2.70	3.24	22.0	28.0
MHAF1250SG2R2M	2.20	4.00	4.80	18.0	23.0

MHAF1250SG3R3M	3.30	7.50	9.00	14.0	19.0
MHAF1250SG4R7M	4.70	12.0	14.4	11.5	17.0
MHAF1250SG5R6M	5.60	13.0	15.6	10.5	16.0
MHAF1250SG6R8M	6.80	15.0	18.0	9.5	15.0
MHAF1250SG8R2M	8.20	19.0	22.8	8.5	13.0
MHAF1250SG100M	10.0	23.0	26.4	7.5	12.0
MHAF1250SG150M	15.0	34.0	40.8	6.5	10.0
MHAF1250SG220M	22.0	44.0	52.8	5.5	7.00

Notes:

1. All of the electrical specifications are test at 25°C, inductance test at 100KHz/0.25V.
 2. I_{rms} is the current that caused a approximate 40°C temperature rise from 25°C ambient.
 3. I_{sat} is the DC current at which inductance drop approximately 30% from its value without current.
 4. The part temperature(ambient + temp.rise) should not exceed 155°C under worst case operating conditions. Circuit design, component placement, PCB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.
 5. Due to product improvement, Product specifications May be changed discontinuously without advance notice.
- Please contact with sales representatives or product engineers, and theMentech product approval sheet shall be obtained before ordering.

Packaging Spescifications (Units:mm)

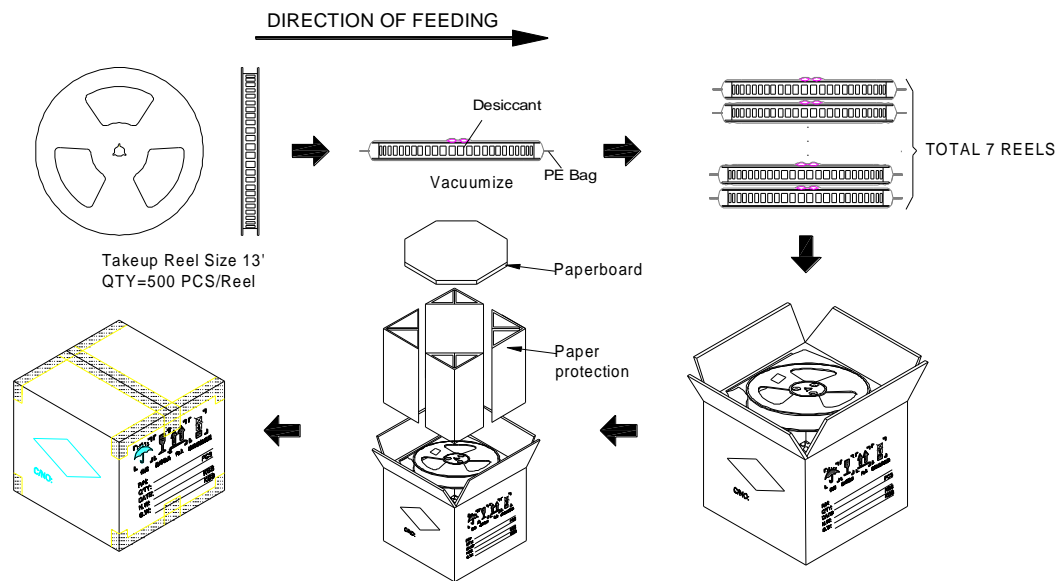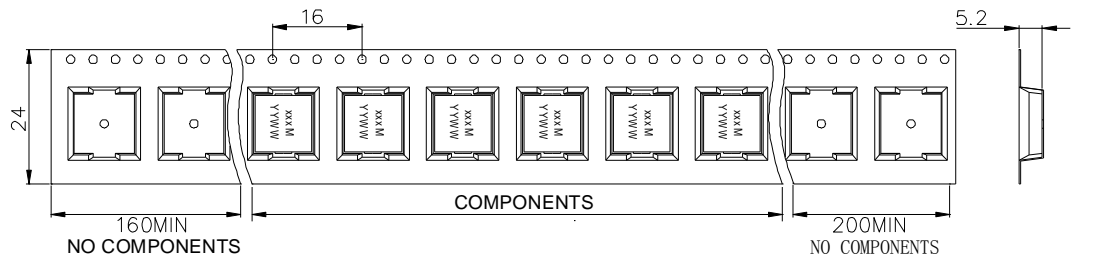

500Pcs/Reel	7Reels/Carton
	3500Pcs/Carton