

- RF Transformer
- Impedance=75Ω
- Operating temperature range: -40°C to +85°C
- Storage temperature range: -55°C to +100°C
- RoHS compliant






Electrical Specifications @25°C, Z₀=75Ω


Part Number	ΩRatio	Insertion Loss(Typ)	DC Current	RF Power	Frequency
		Pri:Sec(6-4:1-3)			
RFT-002SG	1:2	1.0dB	30mA Max	0.25W Max	0.05-450MHz

Note: Insertion Loss is referenced to mid-band loss 0.6dB Typ.

MECHANICAL DIMENSIONS(units:mm)

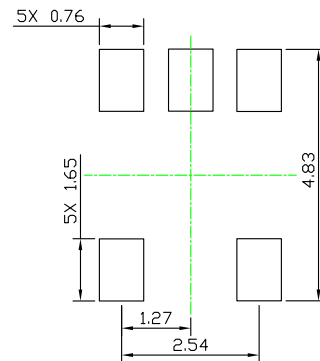

Recommended PAD Layout



Unless otherwise specified all tolerances are:±0.25 mm

SCHEMATIC

