





- RoHS peak reflow temperature rating:245°C
- Miniature surface mount package
- Various impedance ratios available
- Excellent insertion loss
- Ideal for Balanced-to-Unbalanced applications
- Products from 4.5 to 1500 MHz bandwidth




Electrical Specifications @25°C – Operating Temperature -40°C to+85°C

Part Number	Impedance Ratio Pri:Sec	Bandwidth (MHz TYP)		Primary Pins
		2dB	1dB	
RFT-009SG	75Ω:75Ω	1000 to 1500	4.5-1000	4-6

MECHANICAL

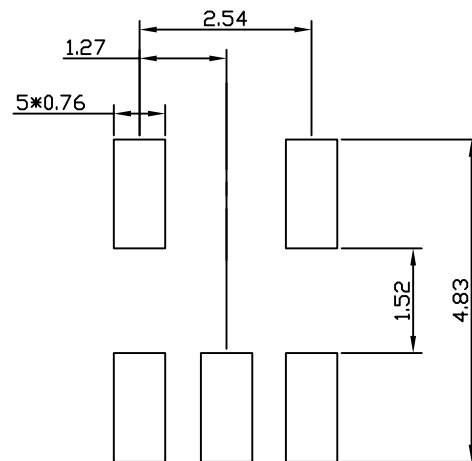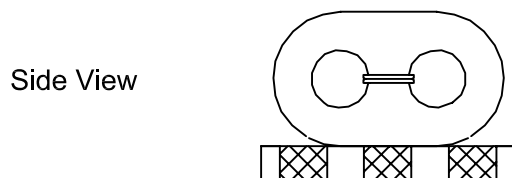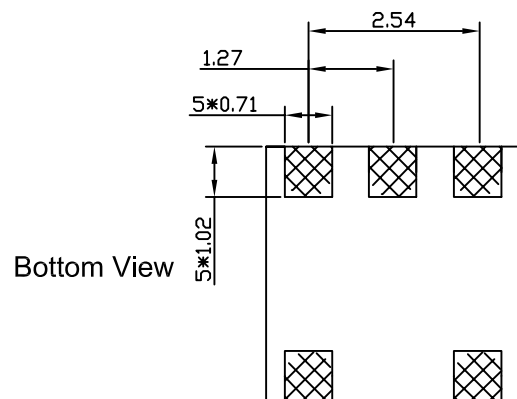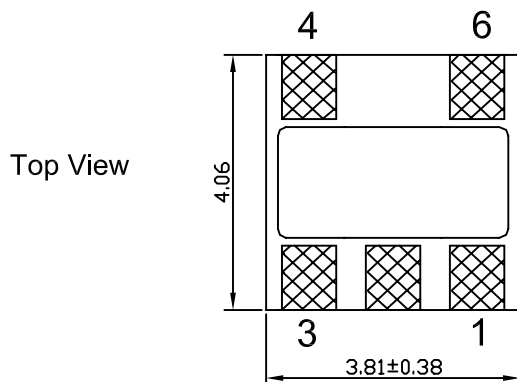

SUGGESTED PAD LAYOUT

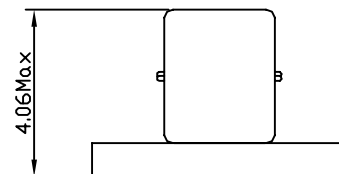

Unless otherwise specified all tolerances are:±0.25 in mm

SCHEMATICS

