

- RF Transformer
- Impedance=50Ω
- Operating temperature range: -40℃ to 85℃
- Storage temperature range: -55℃ to 125℃
- RoHS compliant







Electrical Specifications @25℃ Z₀=50Ω

Part Number	Ω Ratio(TR)	Insertion Loss			DC Current	RF Power	Frequency
	Pri:Sec(6-4:3-1)	500-700MHz	700-1200MHz	1200-3000MHz			
RFT-075SG	1:4(1:2±5%)	2.0dB Max	1.0dB Max	3.0dB Max	50mA	250mW	500-3000MHz

Note: Insertion Loss is referenced to mid-band loss 0.2dB typ.

MECHANICAL

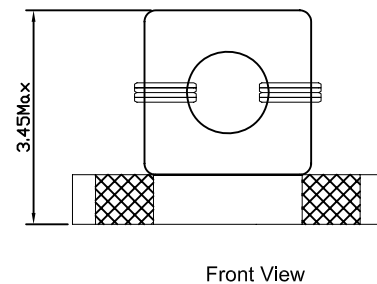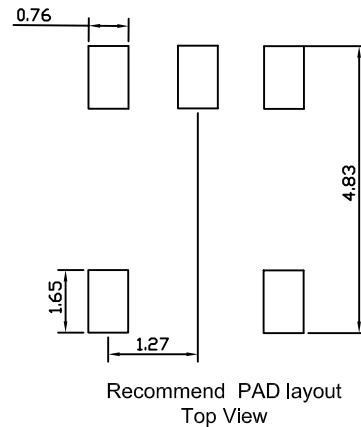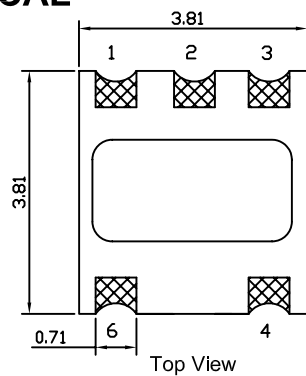

Unless otherwise specified all tolerances are: ±0.25 in mm

SCHEMATICS

