


- RoHS Compatible (RoHS6).
- Termination finished: Sn-0.7Cu.
- Storage temperature range : -40°C to +125°C.
- Operate temperature range: -40°C to +125°C (including self-temperature rise)

Electrical Specifications @25°C										
Part Number	Turns Ratio(±3%)	OCL(μH ±25%) @100KHz,1V	LK(μH Max) @100KHz,1V	DCR (mΩmax)				HI-POT (VDC)		
	1-2-3:4-5-6	1-3	1-3(short 4-5-6)	1-2	2-3	4-5	5-6	Pri-Sec	Pri-Core	Sec-Core
TPEIR25-0178SG	3:3:3:3	200	0.1	6.5	6.5	6.5	6.5	1500V 60s 1mA	500V 60s 1mA	500V 60s 1mA

## MECHANICAL DIMENSIONS (UNITS:mm)

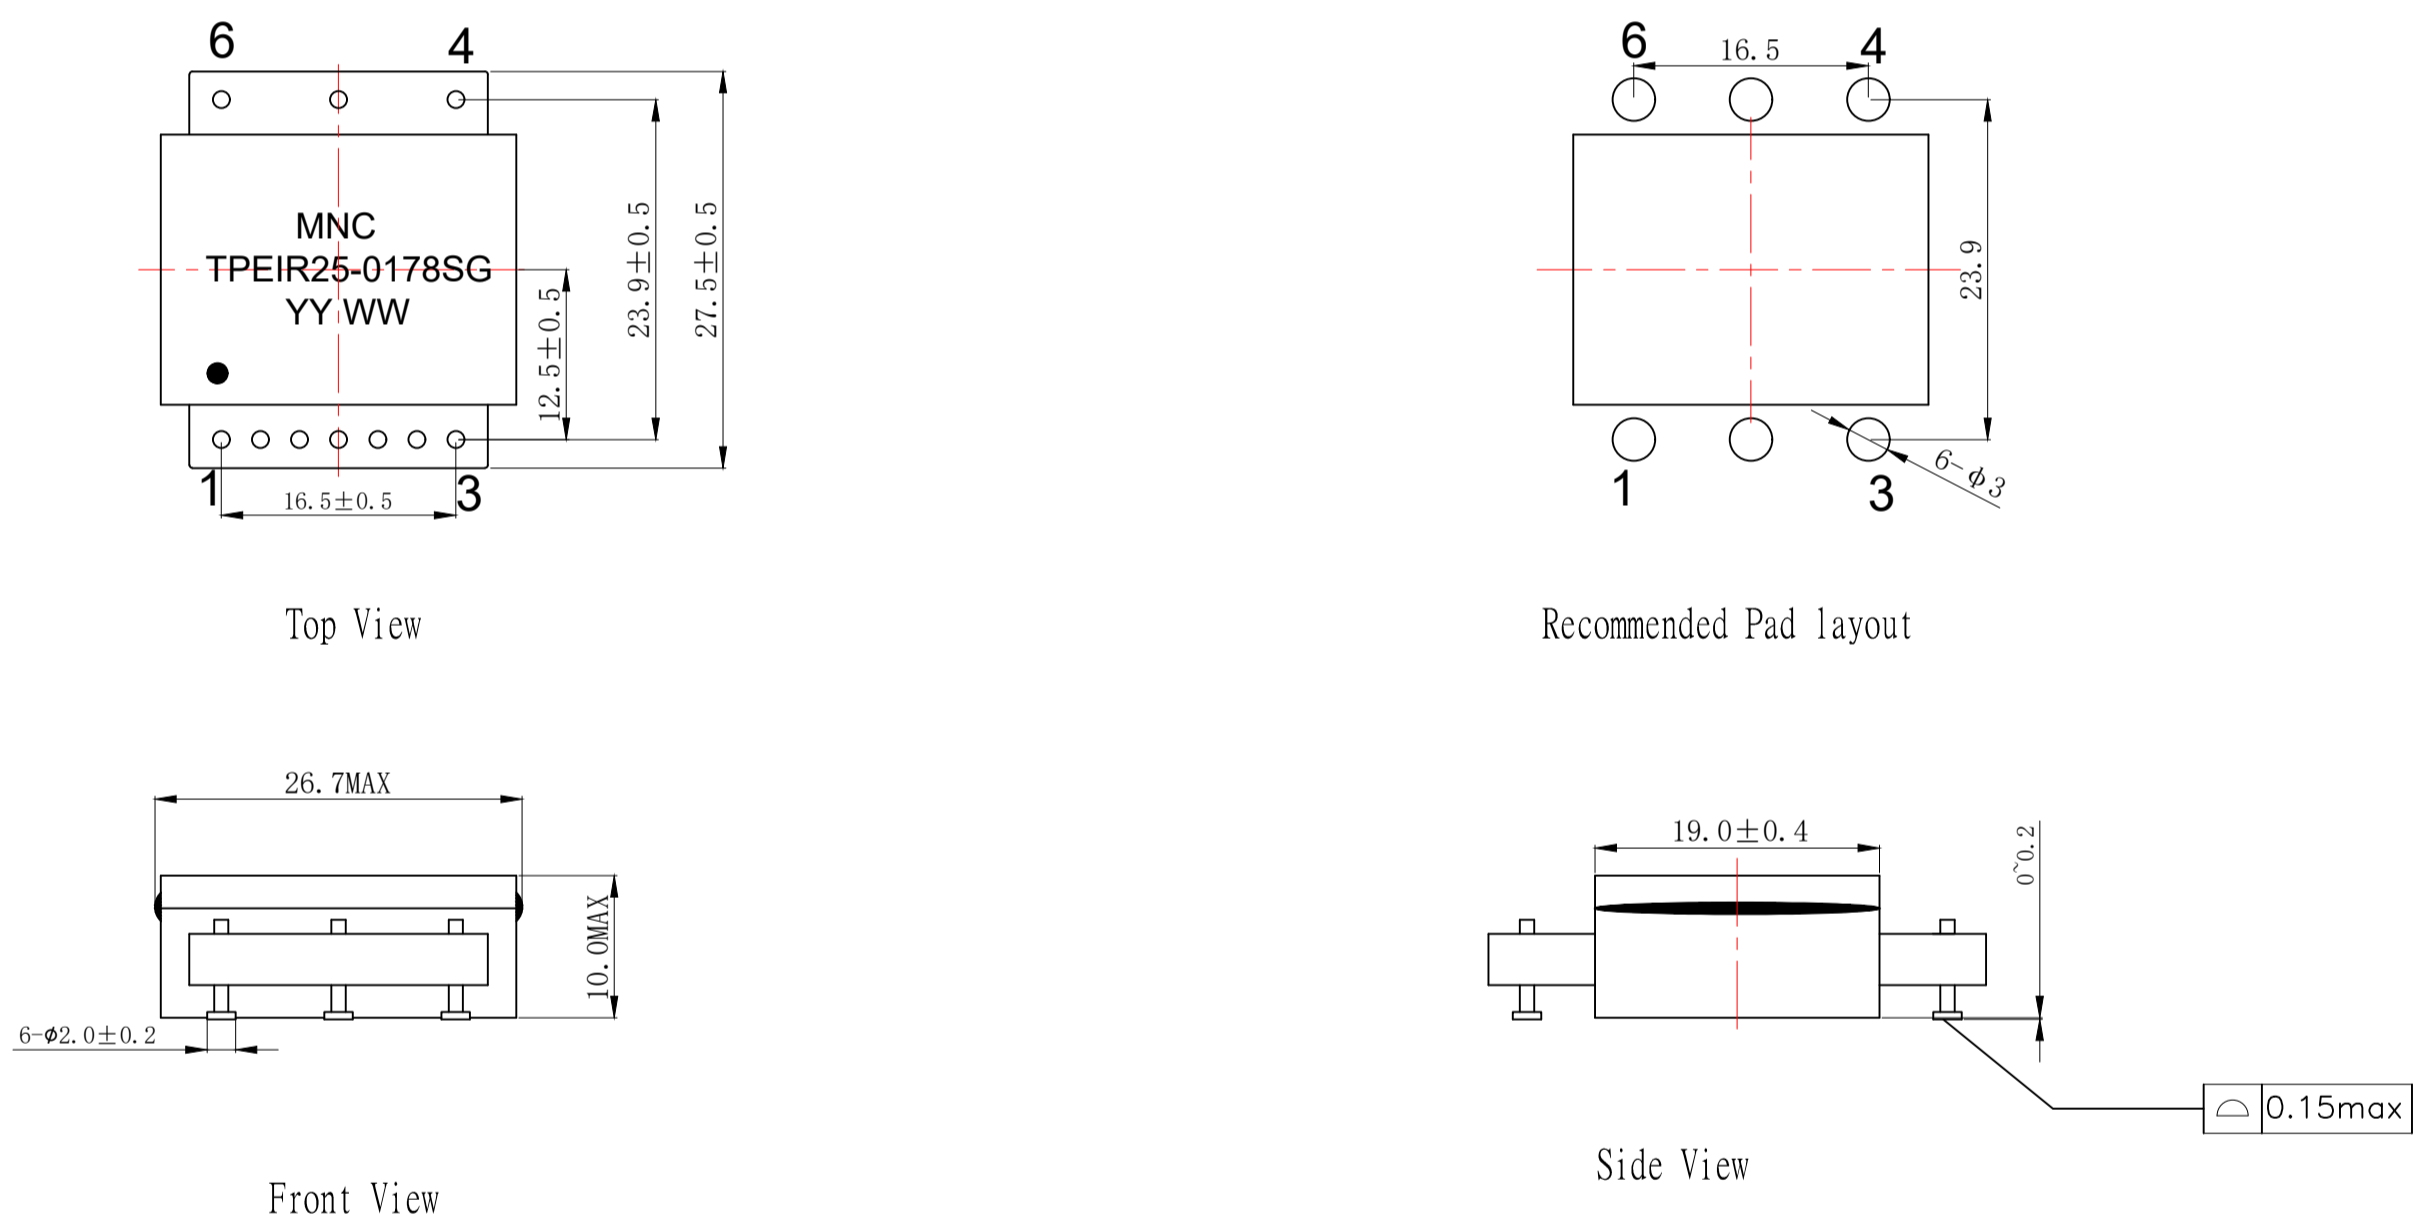

● Unless otherwise specified all tolerances are:±0.25mm

## SCHEMATICS

