

RoHS Compliant (RoHS6).

IEC60950 Compliancy.

Termination finished: Sn-0.7Cu.


Storage temperature range : -40°C to +125°C.

Operating temperature range: -40°C to +130°C(including self-temperature rise)

### Electrical Specifications @25°C

Part Number	Turns Ratio @20KHz,1V	OCL @100KHz,0.25V	LK @100KHz,0.25V	DCR (Ω Max)	HI-POT (5mA,60Sec 50HZ)	Interlayer test	Insulation impedance
		N1:N2:N3:N4	1-2	1-2 (短路其它脚)	1-2	P-S/ P,S-C	1-2
TTAEF20-2011DG	120:19:19:24	2.3mH±10%	50uH MAX	2.0 MAX	AC2.0KV Arcing test 6级	脉冲电压1.2KV	DC500V 100MΩ MIN

## MECHANICAL DIMENSIONS

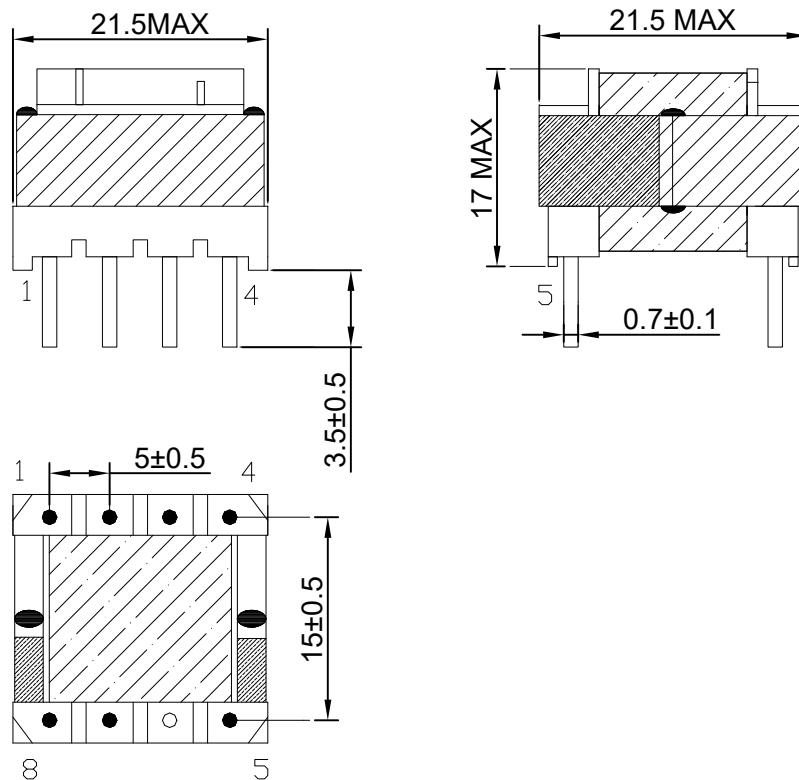

● Unless otherwise specified all tolerances are:±0.5 mm

## SCHEMATICS

