


- RoHS Compliant (RoHS6).
- IEC60950 Compliancy.
- Termination finished: Sn-0.7Cu.
- AEC-Q200 +125°C (Grade 1) qualified.
- Storage temperature range : -40°C to +125°C.
- Operate temperature range : -40°C to +125°C. (Including self temperature rise)

Electrical Specifications @25°C


Part Number	Turns Ratio @20KHz,1V	OCL @100KHz,0.1V	LK @100KHz,0.1V	DCR (mΩ Max)				HI-POT (1mA,60Sec)		
	1-3:2-4:10-9:7-6	1-3	1-4 (Short2+3,6+7+9+10)	1-3	2-4	10-9	7-6	1,2,3,4-6,7,9,10	Wdg-Core	6,7-9,10
TTAEFD14-1411SG	1:1:0.6818:0.6818 ±3%	300uH Min	6uH max	300	300	250	280	2700Vac	1500Vac	2500Vac

MECHANICAL DIMENSIONS(mm)

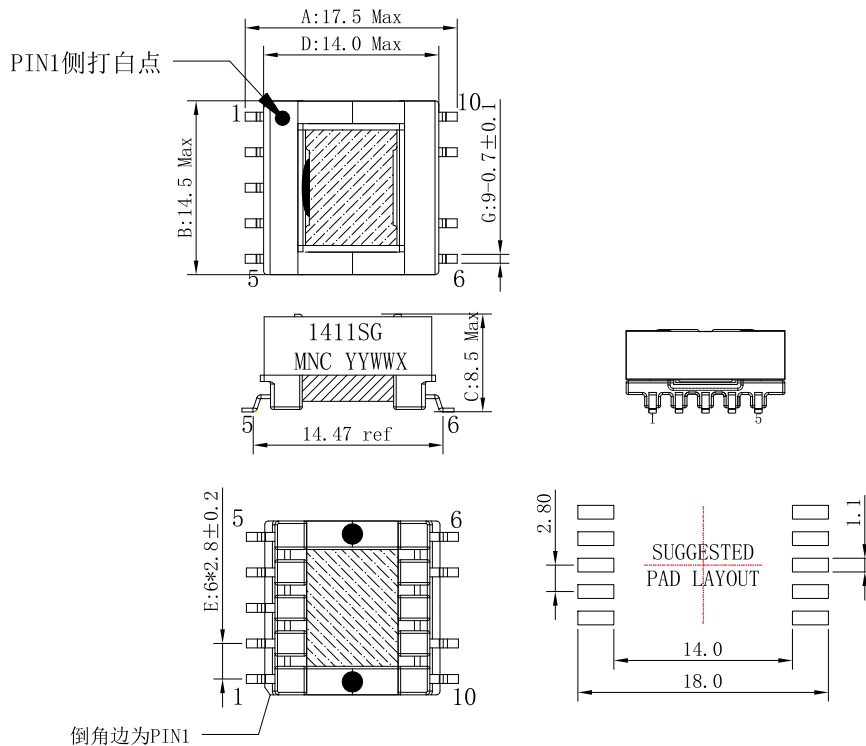

Unless otherwise specified all tolerances are:±0.25 in mm

SCHEMATICS

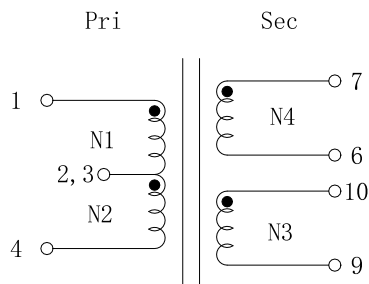

● Start Point