


- RoHS Compliant (RoHS6).
- IEC60950 Compliant.
- Termination finished: Sn-0.7Cu.
- AEC-Q200 Qualified
- Storage temperature range : -40°C to +125°C.
- Operate temperature range: -40°C to +125°C(including self-temperature rise)



Electrical Specifications @ 25°C


Part Number	OCL(uH) @100KHz,0.1V	LK (uH Max) 100KHz, 0.1V	Turns Ratio (±3%)	DCR mΩ max				HI-POT (60s, 1mA, 50/60Hz)			Impulse 1500V, 5pulses
	3-2	3-2(short other pins)		N1:N2:N3:N4:N5:N6	3-2	5-6	14-12	10-8	2,5-10,14	10-14	
TTAEFD25-2016DG	1.5±10%	0.1	2:6:9:4:9:3	TBD	TBD	TBD	TBD	3000VAC	3000VAC	1500VAC	3-2
											10% AREA Max

MECHANICAL DIMENSIONS(mm)

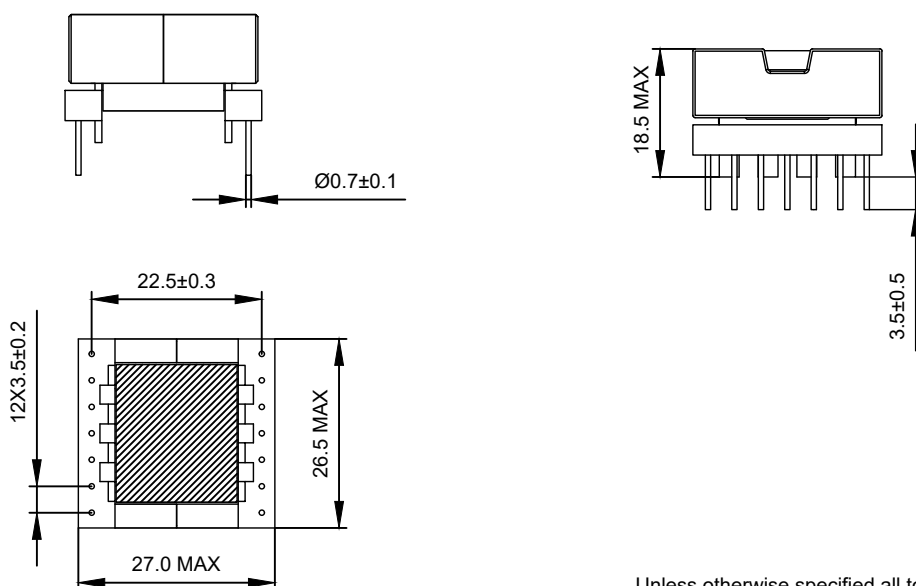

Unless otherwise specified all tolerances are:±0.25 in mm

SCHEMATICS

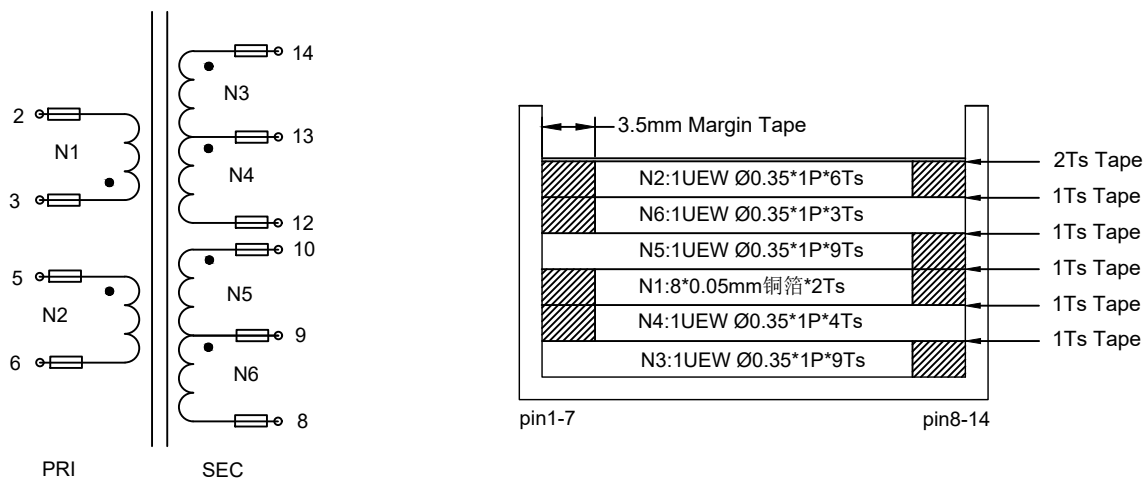

● Start Point