




- Dual SMT Package contains both transmit and receive transformers
- Models matched to leading transceivers
- RoHs Compliance
- Operating temperature range: -40°C to +85°C.



Electrical Specifications @25°C

Part Number	Turns Ratio (±2%)	Pri OCL (mH Min)	LL (uH Max)	CWW (pF Max)	DCR(25°C) (ΩMax)		HI-POT (Vrms)	Primary Pins
	Pri:Sec	100KHz 0.2V	100KHz 0.2V	100KHz 0.2V	1-3/6-8/11-9	16-14		
TE1639AE	1CT:1CT/1CT:2.4CT	1.0&1.0	0.8&0.8	30&30	0.85	1.50	1500	1-3/6-8

MECHANICAL

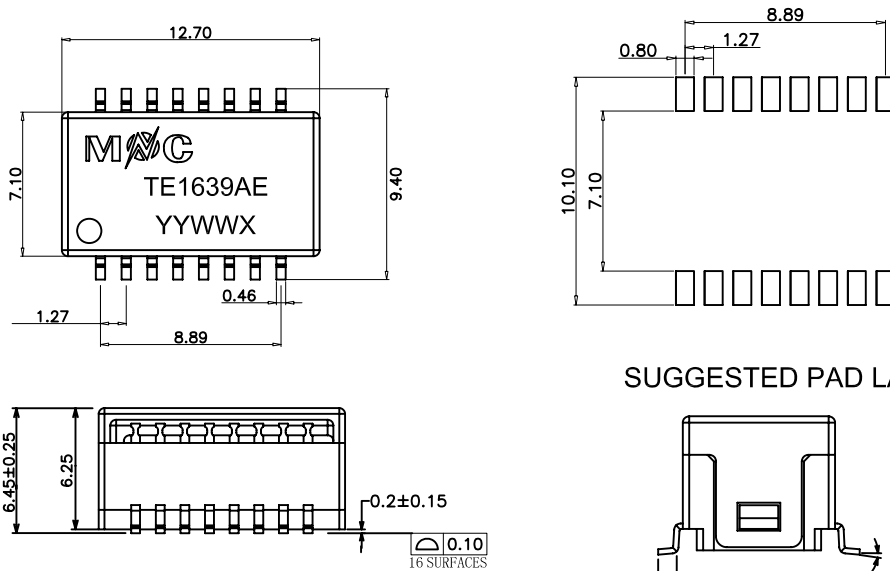

SUGGESTED PAD LAYOUT

Unless otherwise specified all tolerances are:±0.25 in mm

SCHEMATICS

