


- Meets IEEE 802.3 & ANSI X 3.263 Standards.
- RoHS Compliant.
- 10/100/1000 Base-T, Surface Mount Type, Open Header .
- Operating temperature range: 0 °C to +70 °C



Electrical Specifications @25°C

Part Number	Insertion Loss (dB Max)	Return Loss (dB Min)		Cross talk (dB Min)			CMRR (dB Min)	HI-POT (Vrms)
	0.5-100MHz	0.5-40MHz	40.1-100MHz	30MHz	60MHz	100MHz	0.5-100MHz	
G2413CG	-1.1	-18	$-12+20*\log(f/80)$	-43	-37	-33	-30	1500
	Continue							
	OCL(uH Min) With 8mA Bias @100KHz,0.2V	Turns Ratio (±2%)	Lk (uH Max) @100KHz,0.2V	Cw/w (pF Max) @100KHz,0.2V	DCR (Ω Max)	Polarity		
	350		1CT:1	0.5				

MECHANICAL

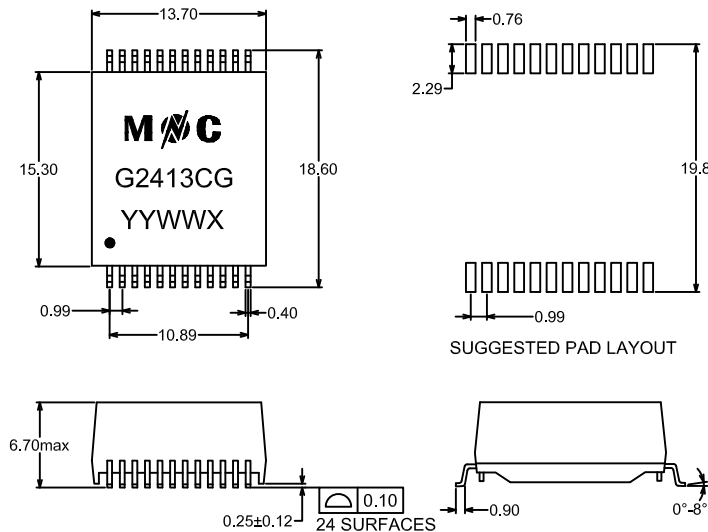

Unless otherwise specified all tolerances are:±0.25 in mm

SCHEMATIC

