




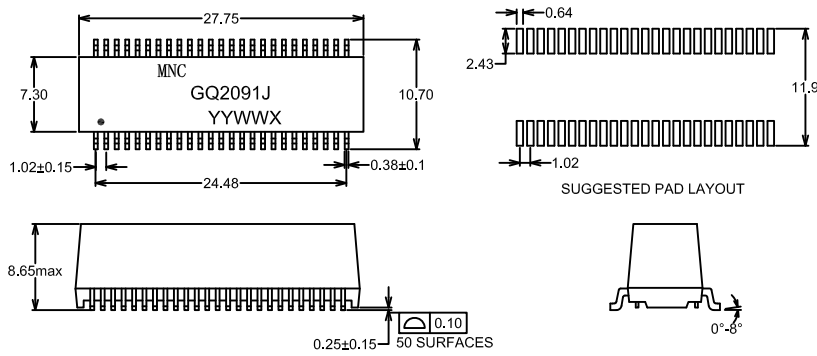




-  Meets IEEE 802.3ab Standards.
-  RoHS Compliant.
-  10/100/1000 Base-T, Surface Mount Type, Open Header .
-  Operating temperature range: 0°C to +70°C
-  600mA Current Capability Per POE Port.

Electrical Specifications @25°C											
Part Number	OCL(μH Min) @100KHz,0.2V With 8mA DC Bias	Turns Ratio (±5%)	Insertion Loss (dB Max)			Return Loss (dB Min)		Cross talk (dB Min)		CMRR (dB Min)	HI-POT (Vrms)
			0.5-100MHz	0.5-40MHz	40.1-100MHz	0.5-40MHz	40.1-100MHz	0.5-100MHz			
GQ2091J	350	1CT:1CT	-1.1	-18	-12+20*log(f/80)	-35	-33+20*log(f/50)	-30	1500		

## MECHANICAL



Unless otherwise specified all tolerances are:±0.5 in mm

## SCHEMATICS

