



- Meets IEEE 802.3u Standards.
- RoHS Compliant.
- 10/100 Base-T, Through-Hole Type.
- Operating temperature range: 0°C to +70°C.

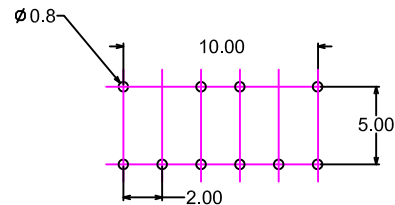


Electrical Specifications @25°C													
Part Number	OCL(uH Min) @100KHz,0.1V With 8mA DC Bias	Turns Ratio (±5%) 60KHz 1V	Insertion Loss (dB Max) 0.1-100MHz	Return Loss (dB Min)			Cross talk (dB Min)			DCMR (dB Min)			HI-POT (Vrms) 1mA 6S
				30MHz	60MHz	80MHz	30MHz	60MHz	100MHz	30MHz	60MHz	100MHz	
HE2014B	350	1CT:1CT	-1.15	-20	-14	-12	-45	-40	-35	-42	-37	-33	1000


MECHANICAL



SUGGESTED PAD LAYOUT



PIN8、11为空脚



Unless otherwise specified all tolerances are:±0.25 in mm

SCHEMATICS

