






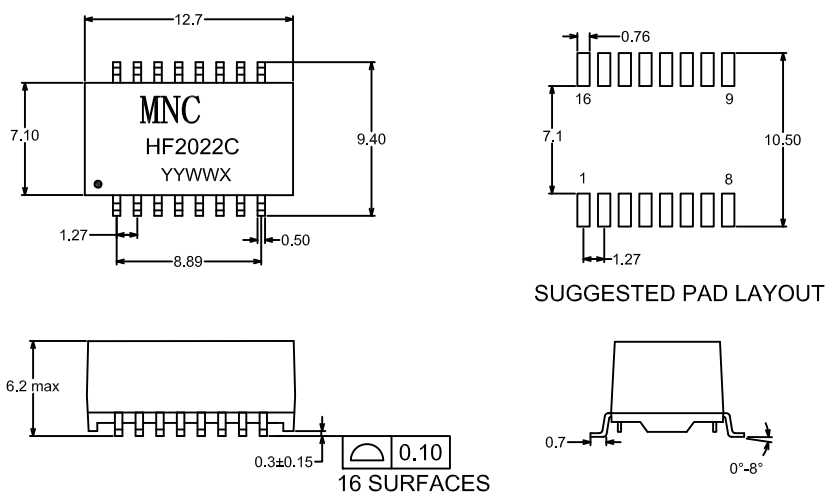
-  Meets IEEE 802.3u Standards.
-  RoHS Compliant.
-  10/100 Base-T, Surface Mount Type, Open Header .
-  Operating temperature range: -40°C to +85°C
-  350mA Current Capability Per POE Port/Two Pairs.



Electrical Specifications @25°C

Part Number	OCL(uH Min) @100KHz,0.2V	Turns Ratio (±5%)	Insertion Loss (dB Max)	Return Loss (dB Min)			Cross talk (dB Min)		CMRR (dB Min)	HI-POT (Vrms)
	With 8mA DC Bias		0.5-100MHz	0.5-30MHz	30.1-60MHz	60.1-80MHz	0.5-40MHz	40.1-100MHz		
HF2022CTL	350	1CT:1CT	-1.1	-18	-18+20*log(f/30)	-12	-35	-30	-30	1500

MECHANICAL



Unless otherwise specified all tolerances are:±0.25 in mm

SCHEMATICS

