



# T1/E1/CEPT/ISDN-PRI TRANSFORMERS QUAD PORT SURFACE MOUNT TYPE


- Octal SMT Package contains both transmit and receive transformers
- Models matched to leading transceivers
- RoHs Compliance
- UL recognized
- Extended and standard Temperature Range



## Electrical Specifications @25°C

Part Number	Turns Ratio (±5%)	OCL PRI (mH Min)	LL (uH Max)	CWW (pF Max)	DCR(25°C) (Ω Max)	HI-POT	Primary Pins	
	Pri:Sec	10KHz, 0.1V	100KHz 0.2V	100KHz 0.2V	Pri		Transmit	Receive
TE4006CG	1:2.42	1.2&1.2	0.6&0.6	35&35	1.2	1500VAC	1-3,6-8,11-13,16-18	4-5,9-10,14-15,19-20

## MECHANICAL

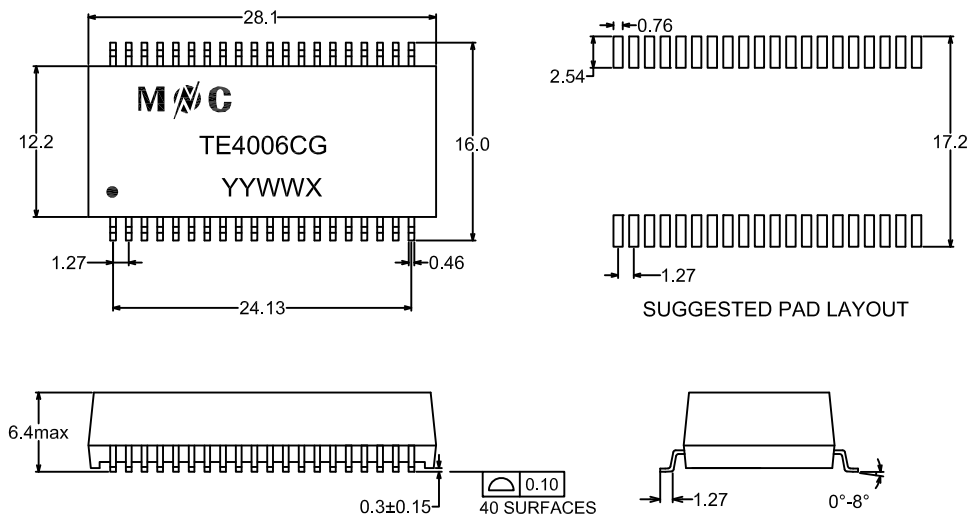

Unless otherwise specified all tolerances are:±0.25 in mm

## SCHEMATICS

