






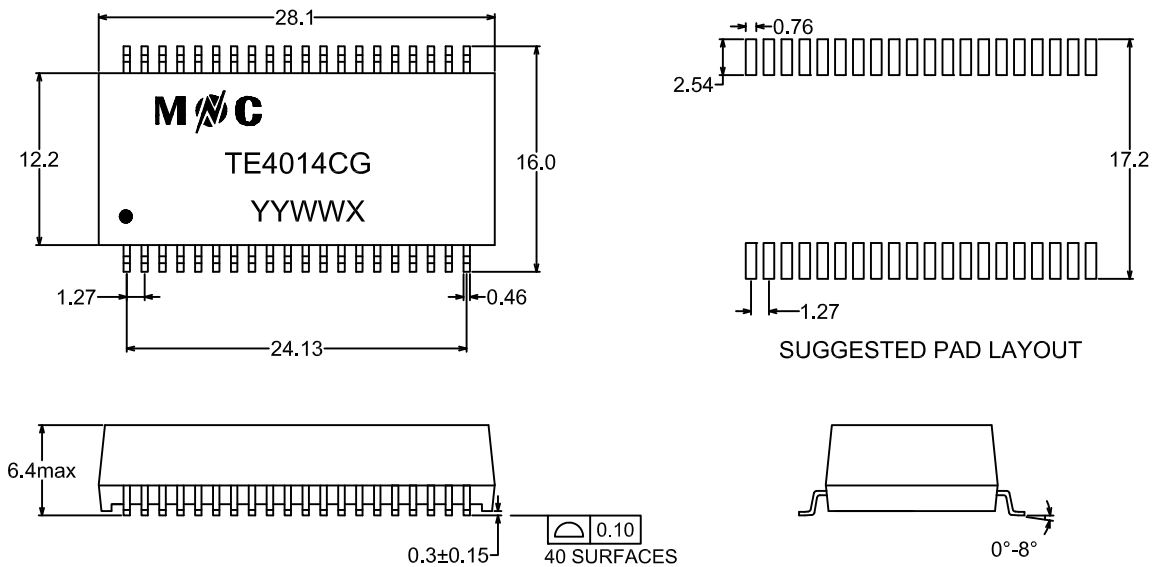
-  Octal SMT Package contains both transmit and receive transformers
-  Models matched to leading transceivers
-  RoHs Compliance
-  UL recognized
-  Operating temperature range: 0 °C to +70 °C



Electrical Specifications @25°C

Part Number	Turns Ratio (±5%)	OCL PRI (mH Min)	LL (uH Max)	CWW (pF Max)	DCR(25°C) (Ω Max)	HI-POT	Primary Pins	
	Pri:Sec	100KHz, 0.2V	100KHz 0.2V	100KHz 0.2V	Pri		Transmit	Receive
TE4014CG	1:2CT&1:1CT	1.2&1.2	0.6&0.6	35&35	1.2	1500VAC	1-2,6-7,11-12,16-17	21-22,26-27,31-32,36-37

MECHANICAL



Unless otherwise specified all tolerances are:±0.25 in mm

SCHEMATICS

