


- Octal SMT Package contains both transmit and receive transformers
- Models matched to leading transceivers
- RoHs Compliance
- Operating temperature range: 0°C to +70°C
- Storage temperature range: -25°C to +125°C



Electrical Specifications @25°C								
Part Number	Turns Ratio (±2%)	OCL PRI (mH Min)	Lk (uH Max)	CWW (pF Max)	DCR(25°C) (Ω Max)	HI-POT	Primary Pins	
	Pri:Sec	100KHz, 0.1V	100KHz 0.2V	100KHz 0.2V	Pri		Transmit	Receive
TE4005CG	1:2.4&1:1	1.2&1.2	0.5 & 0.5	35&35	1.2	1650VAC	1-2,8-9,11-12,18-19	24-25,27-28,34-35,37-38

MECHANICAL

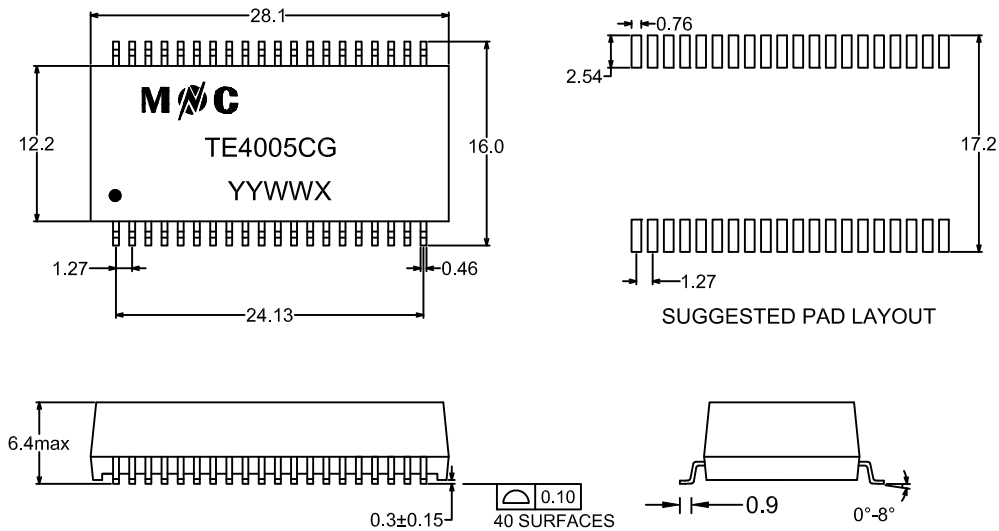

Unless otherwise specified all tolerances are:±0.25 in mm

SCHEMATICS

