


- IEC60950 Compatible.
- RoHS Compliant.
- Surface Mount Device.
- Operating temperature range (Including self temperature rise): -40 °C to +125 °C.



Electrical Specifications @25 °C							
Part Number	Turns Ratio(±3%)	OCL(uH±10%) @100KHz,0.1V	LK(uH max) @100KHz,0.1V	DCR (mΩ max)			HI-POT (DC)
	1,2-11,12:5,6-7,8:3-10	1,2-11,12	1,2-11,12 (short other pins)	1,2-11,12	3-10	5,6-7,8	Pri/Aux-Sec
EFD-207SG	1:1.1:1.363	9.0	1.0	35	300	35	1500


## SCHEMATICS

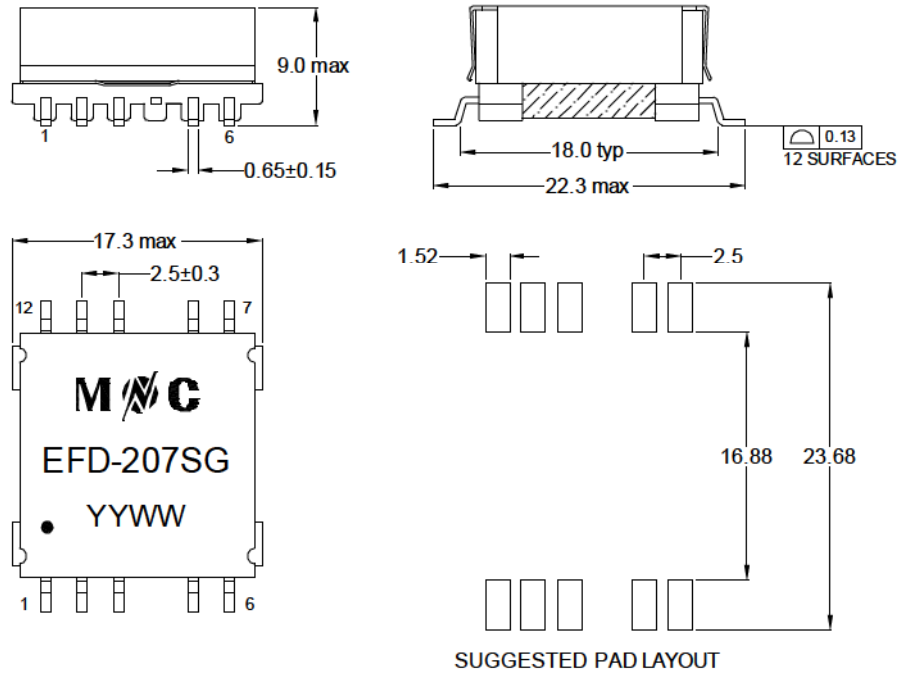

Cut off: pin4,9

Unless otherwise specified all tolerances are: ±0.25 in mm

## SCHEMATICS

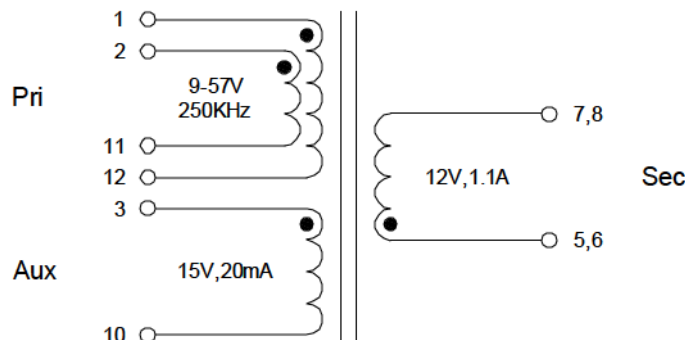

Tape&Reel Weigh

250pcs per reel  
6.40g/pcs