


- IEC60950 Compatible.
- RoHS Compliant.
- Surface Mount Device.
- Operating temperature range (Including self temperature rise): -40 °C to +125 °C.




Electrical Specifications @25 °C							
Part Number	Turns Ratio(±3%)	OCL(uH±10%) @100KHz,0.2V	LK(uH max) @100KHz,0.2V	DCR (mΩ max)			HI-POT (Vrms)
	1-2:6,7-9,10:4-5	1-2	1-2 (short other pins)	1-2	4-5	6,7-9,10	Pri/Aux-Sec
EP-389SG	1:0.565:0.52	100.5	0.9	110	561	40	1500

SCHEMATICS

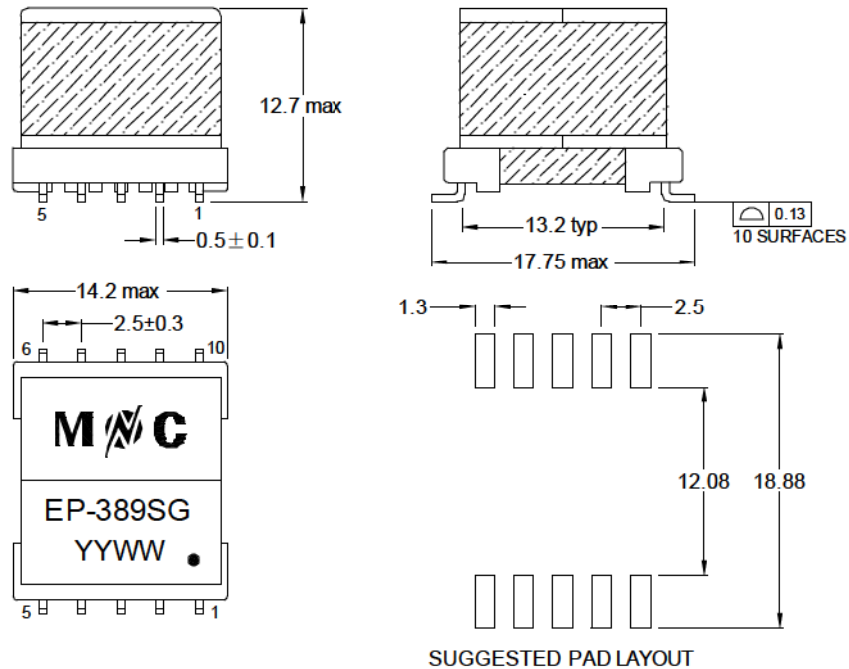

Unless otherwise specified all tolerances are: ±0.25 in mm

SCHEMATICS

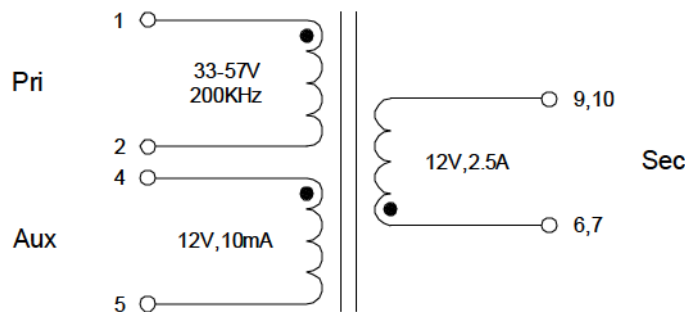

Tape&Reel Weigh 200pcs per reel
6.30g/pcs