


- IEC60950 Compatible.
- RoHS Compliant.
- Surface Mount Device.
- Operating temperature range (Including self temperature rise): -40 °C to +125 °C.




Electrical Specifications @25 °C						
Part Number	Turns Ratio(±3%)	OCL(uH±10%) @200KHz,0.2V	LK(uH max) @200KHz,0.2V	DCR (mΩ max)		HI-POT (Vrms)
	2-1:7,8-9,10	2-1	2-1 (short other pins)	2-1	7,8-9,10	Pri-Sec
EP-425SG	1:0.3	L _{0A} =40 L _{2.0A} ≥ 90%(L _{0A})	0.7	100	25	1500

SCHEMATICS

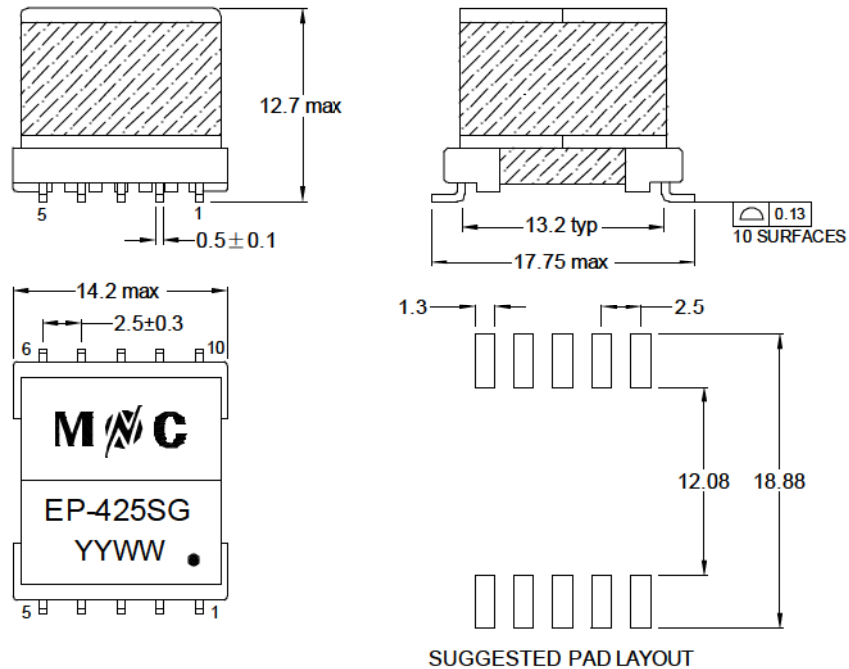

Unless otherwise specified all tolerances are: ±0.25 in mm

SCHEMATICS

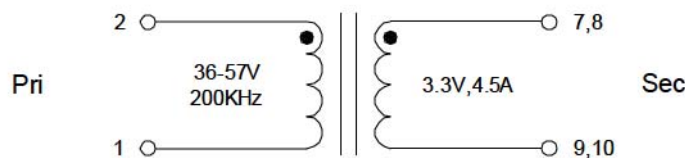

Tape&Reel Weigh 200pcs per reel
6.70g/pcs