


- IEC60950 Compatible.
- RoHS Compliant.
- Surface Mount Device.
- Operating temperature range (Including self temperature rise): -40 °C to +125 °C.




Electrical Specifications @25 °C								
Part Number	Turns Ratio(±3%)	OCL(uH±10%) @100KHz,0.1V	LK(uH max) @100KHz,0.1V	DCR (mΩ max)				HI-POT (Vrms)
	5-4:7-6:10-9:2-1	5-4	5-4 (short other pins)	5-4	2-1	7-6	10-9	pin (2,4-7,9)
EP-558SG	1:0.24:0.24:0.56	96	1.0	170	190	21	50	1500

SCHEMATICS

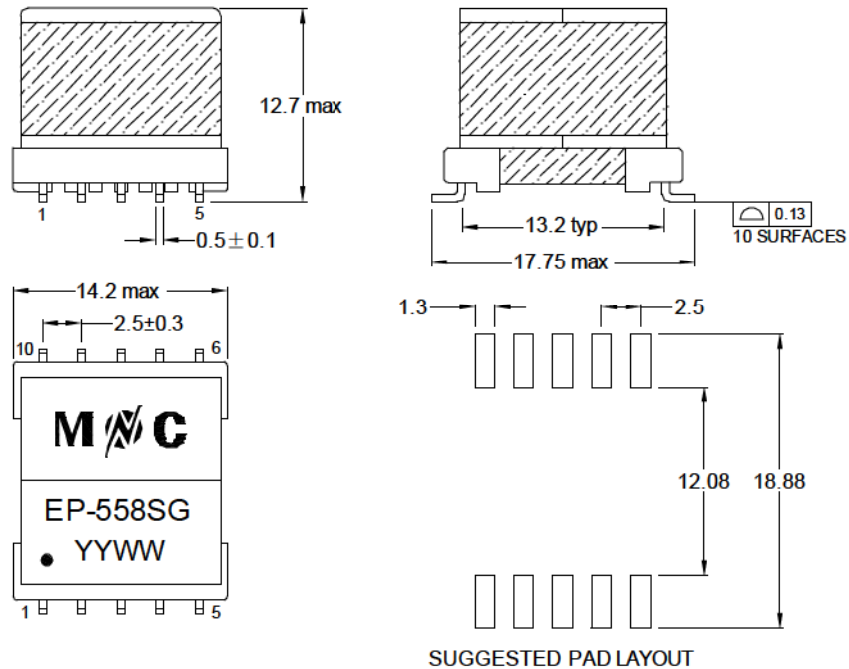

Unless otherwise specified all tolerances are: ±0.25 in mm

SCHEMATICS

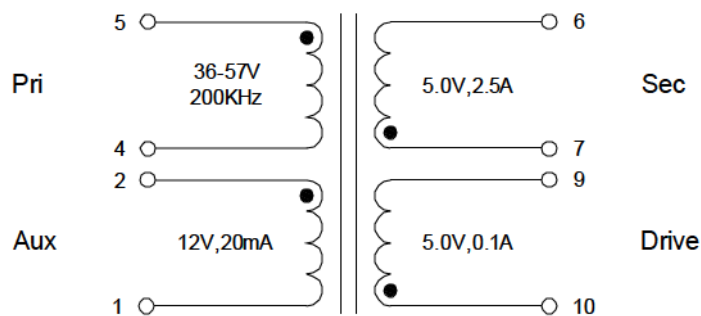

Tape&Reel Weight 200pcs per reel
6.12g/pcs