







-  Meets IEEE 802.3 & ANSI X 3.263 Standards.
-  RoHS Compliant.
-  10/100/1000 Base-T, Surface Mount Type.
-  Operating temperature range: 0°C to +70°C.




Electrical Specifications @25°C									
Part Number	OCL(uH Min) @100KHz,0.1V With 8mA DC Bias	Turns Ratio (±5%)	Insertion Loss (dB Max)	Return Loss (dB Min)		Cross talk (dB Min)		CMRR (dB Min)	HI-POT (Vrms)
	0.5-100MHz		0.5-40MHz	40.1-100MHz	0.5-40MHz	40.1-100MHz			
G2480CG	350	1CT:1CT	-1.1	-18	-12+20*log(f/80)	-35	-33+20*log(f/50)	-30	1500

## MECHANICAL

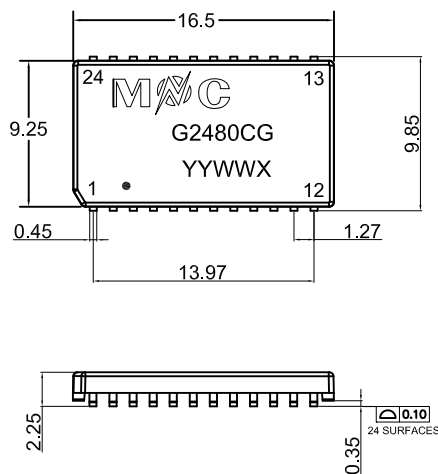

SUGGESTED PCB PAD LAYOUT



Unless otherwise specified all tolerances are:±0.25 in mm

## SCHEMATICS

