






-  Meets IEEE 802.3bz Standards.
-  RoHS Compliant.
-  2.5G Base-T, Surface Mount Type, Open Header.
-  Operating temperature range: 0°C to +70°C.



Electrical Specifications @25°C

Part Number	OCL(uH Min) @100KHz,0.2V	Turns Ratio (±5%)	Insertion Loss (dB Max)			Return Loss (dB Min)		Cross talk (dB Min)	DCMR (dB Min)	CMRR (dB Min)	HI-POT (Vrms)
			1-50MHz	50-125MHz	125-200MHz	1-40MHz	40.1-200MHz				
QJ1032A	150	1CT:1CT	-0.5	-1.0	-2.0	-20	-20+15*log(f/40)	-30	-45+f/35	-30	1500

MECHANICAL

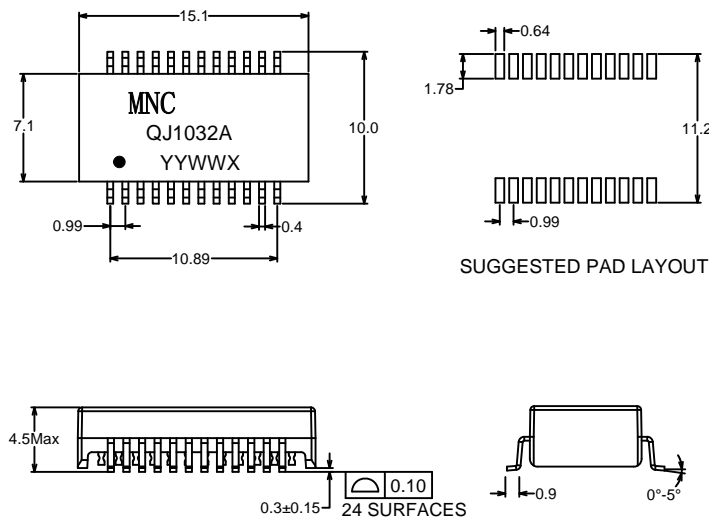

Unless otherwise specified all tolerances are:±0.25 in mm

SCHEMATICS

