


- Meets IEEE 802.3bz Standards.
- RoHS Compliant.
- 2.5G Base-T, Surface Mount Type, Open Header .
- Operating temperature range: 0°C to +70°C.

Electrical Specifications @25°C										
Part Number	OCL(uH Min) @100KHz,0.2V	Turns Ratio (±5%)	Insertion Loss (dB Max)		Return Loss (dB Min)		Cross talk (dB Min)		CMRR (dB Min)	HI-POT (Vrms)
			1-125MHz	125-250MHz	1-40MHz	40-200MHz	1-100MHz	100-200MHz		
QJ2021A	150	1CT:1CT	-1	-2	-16	-16+10*log(f/40)	-35	-25	-25	1500

MECHANICAL

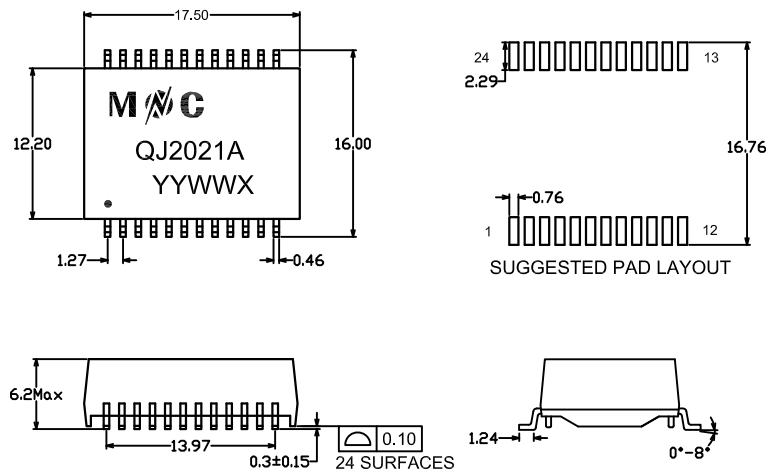

Unless otherwise specified all tolerances are:±0.25 in mm

SCHEMATICS

